


Lithery
FIBRE MANAGEMENT SYSTEM

Lithery's fibre Management Systems is designed to protect and route fibre optic patch cords,manage cable assemblies to and from network cabinets, ODF and other terminal devices.Plastic optical cable tray is the best solution for optical raceway requirements and application with pleasantappearance and quite easy maintenance.Two kinds of raw Material for option, ABS is environment friendly and high-class,PVC offers an relatively cheaper version for tight budget projects.

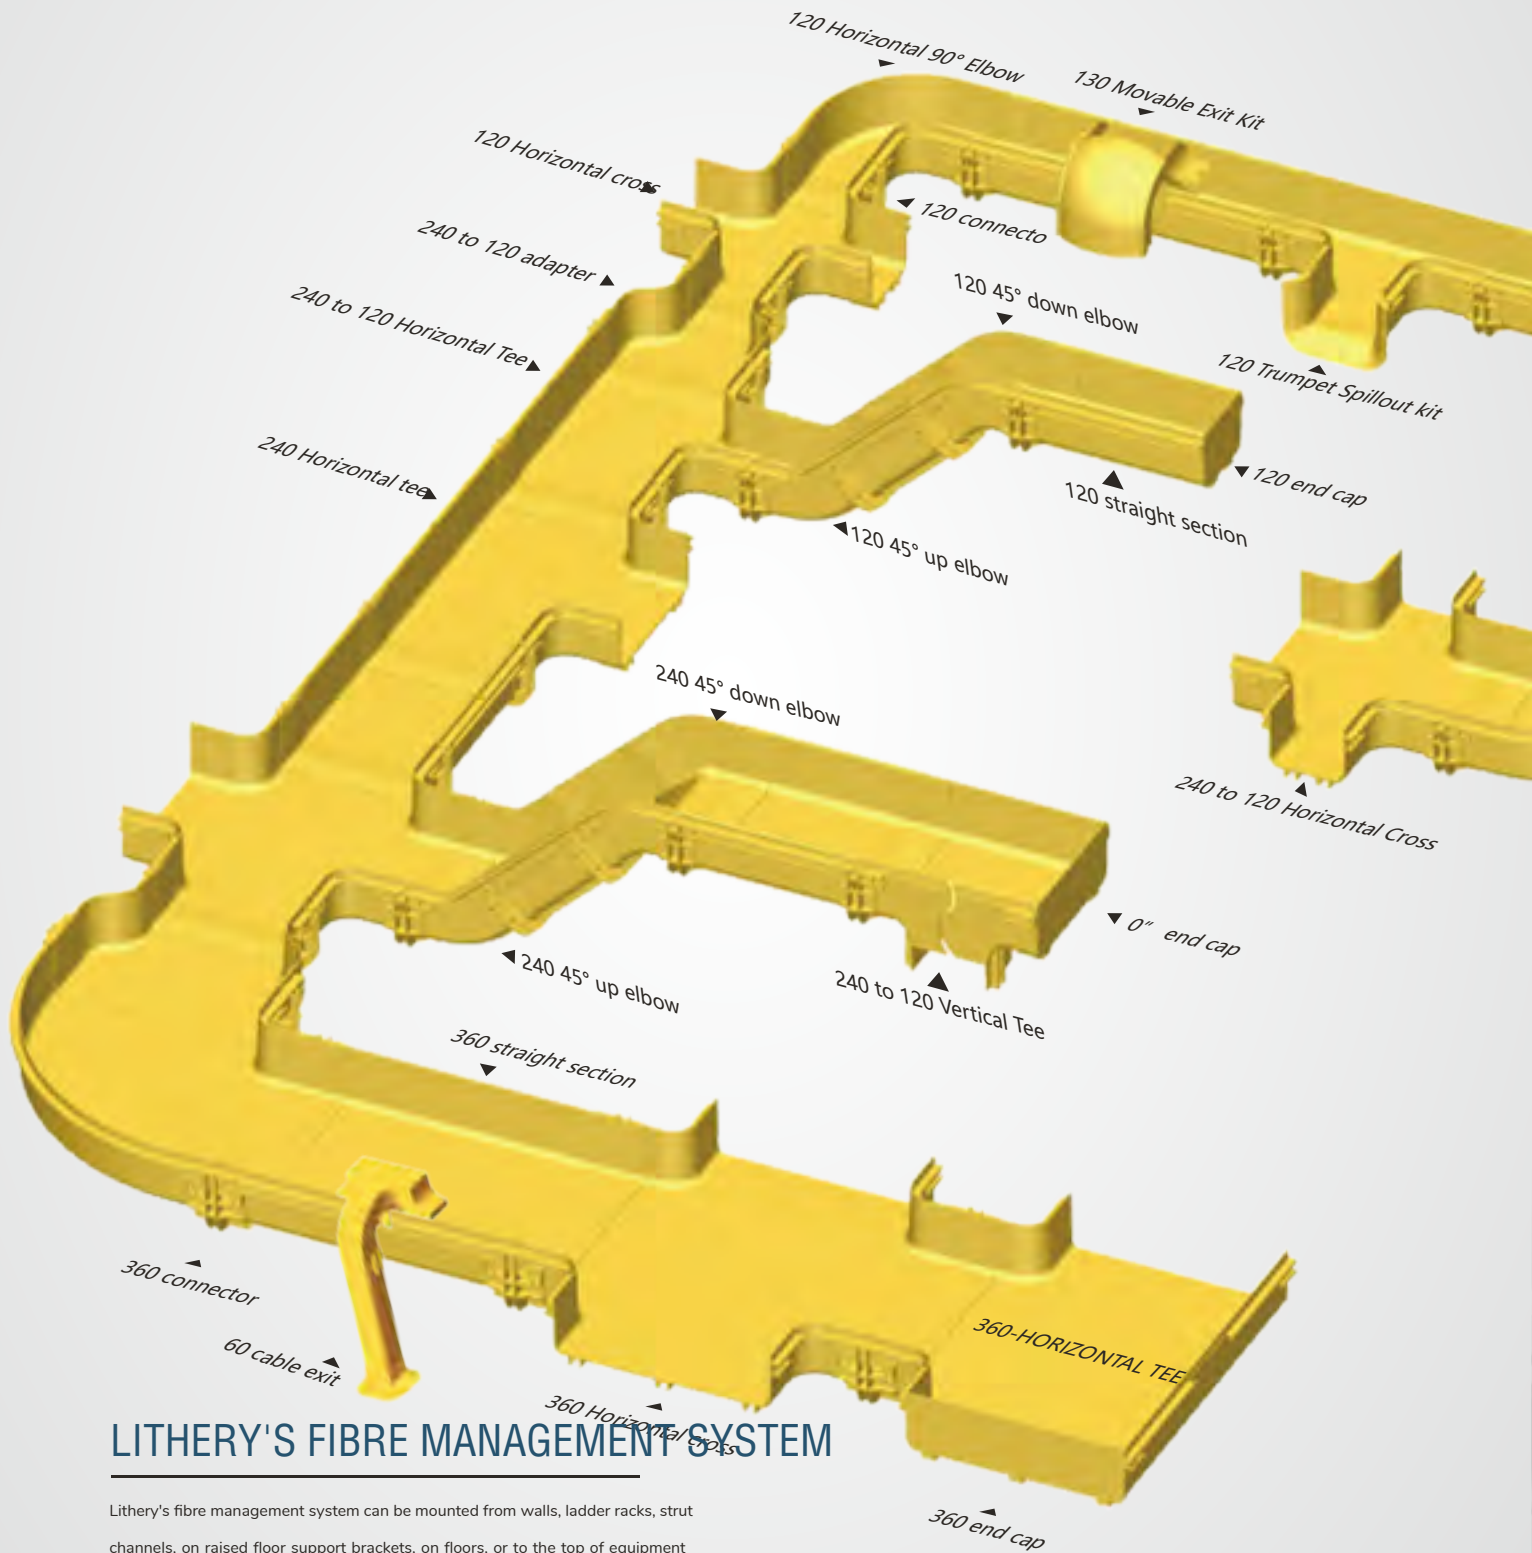

LITHERY'S FIBRE MANAGEMENT SYSTEM

Lithery's fibre management system can be mounted from walls, ladder racks, strut channels, on raised floor support brackets, on floors, or to the top of equipment racks or frames.

Available sizes are 60*60,120*100,240*100, 360*100 and 600*100.

WHY US
FIBRE OPTIC RACEWAY

Fibre optic cords carry far more services and much greater throughput than traditional copper services and downtime or outages can cost tens of thousands of dollars per second in lost revenue for each cord damaged.

Good fibre protection is absolutely essential. Fibre cords are fragile and need to be correctly protected throughout any cabling installation from end to end.

Traditional cable routing on open cable trays and ladders may cause damage to the delicate fibre cables. These methods of routing cables provide no protection for the exposed fibre.

CHARACTERISTIC



Fibre cords need to be segregated from all copper services and routed in enclosed raceway, clearly defined by means of a bright distinctive color. They also need protection against compression, and the minimum bend radius, generally specified as 30mm must not be compromised.



Labour costs incurred in installing cabling infrastructure in telecommunications exchanges or data centres can be very expensive if the system chosen is not easy to install.



All plastic based products used should be self-extinguishing to avoid the risk of harming staff, transmission equipment, rescuers or buildings in the case of a fire



The need for zero down-time when using optical fibre. The system chosen should be easily changed or extended with the need to remove the existing fibre or shut down



All plastic based products should be RoHS compliant

Lithery

FIBRE MANAGEMENT SYSTEM

RECOMMENDED DENSITY

Stacking height	Raceway size	Dia. 1.6mm	Dia. 2.0mm	Dia. 3.0mm	Dia. 5.2mm	Dia. 6.1mm
 50%	60mmx60mm	650	450	200	60	40
	120mmx100mm	2300	1450	650	200	135
	240mmx100mm	4750	2900	1300	425	300
	360mmx100mm	7000	4350	1950	650	460
	600mmx100mm	11700	7500	3300	1100	760
 75%	60mmx60mm	975	675	300	90	60
	120mmx100mm	3450	2175	975	300	200
	240mmx100mm	6975	4350	1950	630	450
	360mmx100mm	10500	6525	2925	975	690
	600mmx100mm	17550	11250	4950	1650	1140
 100%	60mmx60mm	1300	900	400	120	80
	120mmx100mm	4600	2900	1300	400	270
	240mmx100mm	9300	5800	2600	850	600
	360mmx100mm	14000	8700	3900	1300	920
	600mmx100mm	23400	15000	6600	2200	1520

FIBER MANAGEMENT SYSTEM

RACEWAYS

LITHERY'S FIBRE MANAGEMENT SYSTEM



Flame retardant



Anti-impact



Durable



ONE-STOP MANUFACTURER OF HIGH CLASS DATA CENTER INFRASTRUCTURE

Thames 1368, (C1414CDB)
Ciudad de Buenos Aires, Argentina
www.datawaves.com


Lithery

Tel: (54-11) 4777 7707
ventas@datawaves.com

Lithery

FIBRE MANAGEMENT SYSTEM


60 SERIES RACEWAY

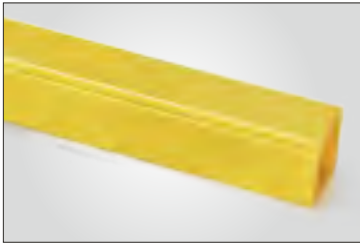

Item No.:	Name	Spec(mm)			Overall (mm)	Color	Material
		W	H	L			
3A100	60 Straight section	60	60	1000	64×64×1000	Yellow	PVC
38111	60 Straight section cover	60	—	—	64×7.5×1000	Yellow	PVC

Used to carry the cables horizontally throughout the system. Accepts cover and fittings.


60 SERIES RACEWAY

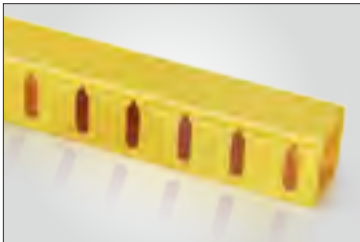

Item No.:	Name	Spec(mm)			Overall (mm)	Color	Material
		W	H	L			
	60 Straight section	60	60	1000	64×64×1000	Yellow	PVC
38111	60 Straight section cover	60	—	—	64×7.5×1000	Yellow	PVC

Suits for cable management inside cabinets and vertically at both side of open frame racks.


120 SERIES RACEWAY

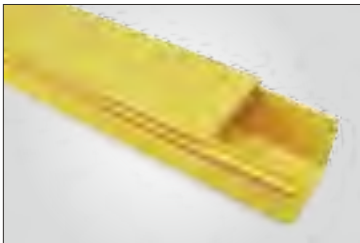

Item No.:	Name	Spec(mm)			Overall (mm)	Color	Material
		W	H	L			
3A300	120 Straight section	120	100	2000	158×118×2000	Yellow	PVC
38192	120 Straight section cover	120	—	—	155×12×2000	Yellow	PVC

Used to carry the cables horizontally throughout the system. Accepts cover and fittings.


240 SERIES RACEWAY

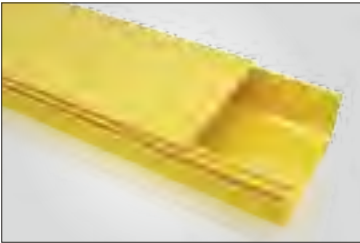

Item No.:	Name	Spec(mm)			Overall (mm)	Color	Material
		W	H	L			
3A600	240 Straight section	240	100	2000	278×118×2000	Yellow	PVC
38611	240 Straight section cover	240	—	—	274×12×2000	Yellow	PVC

Used to carry the cables horizontally throughout the system. Accepts cover and fittings.

360 SERIES RACEWAY

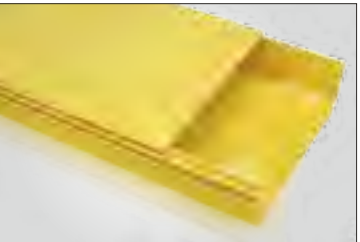

Item No.:	Name	Spec(mm)			Overall (mm)	Color	Material
		W	H	L			
3A800	360 Straight section	360	100	2000	396×118×2000	Yellow	PVC
38811	360 Straight section cover	360	—	—	389×12×2000	Yellow	PVC

Used to carry the cables horizontally throughout the system. Accepts cover and fittings.

600 SERIES RACEWAY



Item No.:	Name	Spec(mm)			Overall (mm)	Color	Material
		W	H	L			
3A900	600 Straight section	600	100	2000	636×118×2000	Yellow	PVC

Used to carry the cables horizontally throughout the system. Accepts cover and fittings.

ONE-STOP MANUFACTURER OF HIGH CLASS DATA CENTER INFRASTRUCTURE

Thames 1368, (C1414CDB)
Ciudad de Buenos Aires, Argentina
www.datawaves.com

Lithery

Tel: (54-11) 4777 7707
ventas@datawaves.com

ONE-STOP MANUFACTURER OF HIGH CLASS DATA CENTER INFRASTRUCTURE

Thames 1368, (C1414CDB)
Ciudad de Buenos Aires, Argentina
www.datawaves.com

Lithery

Tel: (54-11) 4777 7707
ventas@datawaves.com

FIBRE MANAGEMENT 60×60

FIBRE MANAGEMENT SYSTEM

60×60mm FIBRE MANAGEMENT SYSTEM

60×60 FIBRE MANAGEMENT SYSTEM ORDER INFORMATION

No.	Description	Item no.:	Page	Drawing
1	60mm Connector A type	311A0	9	12
2	60mm Horizontal 90° Elbow	31190	9	12
3	60mm 90° Up Elbow	311S0	9	12
4	60mm 90° Down Elbow	311X0	10	12
5	60mm Horizontal Tee	31120	10	12
6	60mm Horizontal Cross	31130	10	12
7	60mm Vretical Tee	31140	11	13
8	60mm End Cap Kit	311G0	11	13


ONE-STOP MANUFACTURER OF HIGH CLASS DATA CENTER INFRASTRUCTURE

Thames 1368, (C1414CDB)
Ciudad de Buenos Aires, Argentina
www.datawaves.com


Lithery

Tel: (54-11) 4777 7707
ventas@datawaves.com

Drawing : on page 12

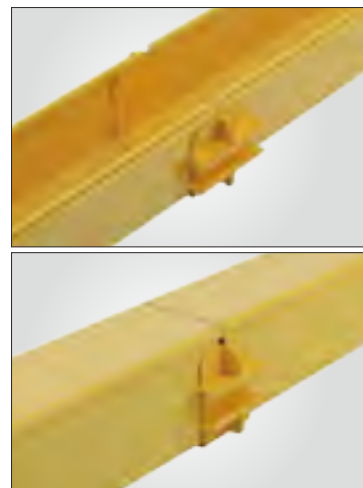

Drawing : on page 12

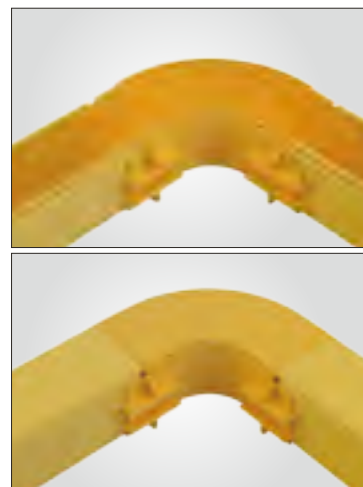


Drawing : on page 12




Drawing : on page 12



Drawing : on page 12

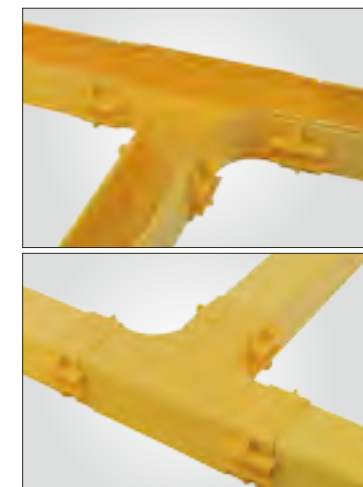

Drawing : on page 12

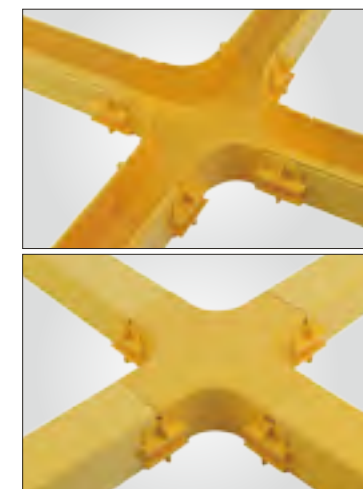


60 MM VERTICAL TEE



Item No.:	Name	Spec(mm)		Overall (mm)	Color	Material
		W	H			
31140	60mm Vretical tee	60	60	68x68x27	Yellow	PVC/ABS
38136	60mm Vretical Tee cover	60	—	204x93.5x7.5	Yellow	PVC/ABS

Used for closing off open ends of the channel or fittings.
Flame retardant : UL94-V0
Drawing : on page 13

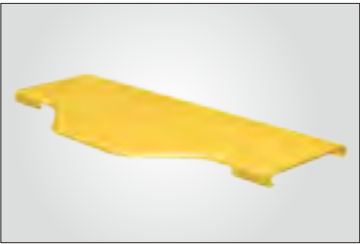



COVER

60 MM END CAP







Item No.:	Spec(mm)		Overall (mm)	Color	Material
	W	H			
311G0	60	60	68x68x27	Yellow	PVC/ABS

Used for closing off open ends of the channel or fittings.
Flame retardant : UL94-V0
Drawing : on page 13

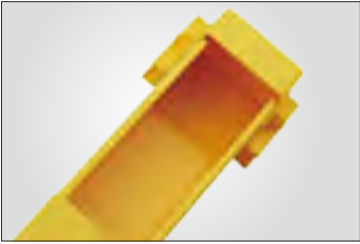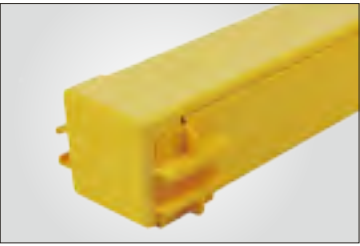

60 SERIES RACEWAY DRAWING

311A0 60mm TYPE A CONNECTOR	
31190 60mm HORIZONTAL 90° ELBOW	
311S0 60mm 90° UP ELBOW	
311X0 60mm 90° DOWN ELBOW	
31120 60mm HORIZONTAL TEE	
31130 60mm HORIZONTAL CROSS	

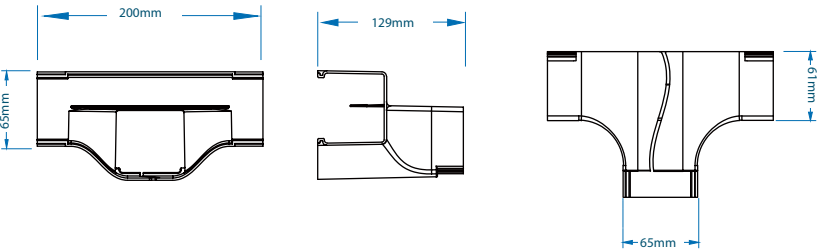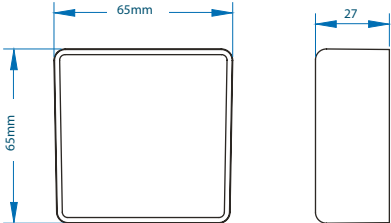31140  60mm Vertical Tee	
311G0  60mm END CAP	

ONE-STOP MANUFACTURER OF HIGH CLASS DATA CENTER INFRASTRUCTURE

Thames 1368, (C1414CDB)
Ciudad de Buenos Aires, Argentina
www.datawaves.com

Lithery

Tel: (54-11) 4777 7707
ventas@datawaves.com

FIBRE MANAGEMENT

120x100

FIBRE MANAGEMENT SYSTEM




120x100

FIBRE MANAGEMENT SYSTEM

ORDER INFORMATION

No.	Description	Item no.:	Page	Drawing
1	120mm TYPE B CONNECTOR KIT	LL232	22	26
2	120mm HORIZONTAL 90° ELBOW	31390	22	26
3	120mm HORIZONTAL 45° ELBOW (CONNECTOR FREE)	LL23F	22	26
4	120mm 45° UP ELBOW	313F0	23	26
5	120mm 45° DOWN ELBOW	31380	23	26
6	120mm HORIZONTAL TEE	31320	23	26
7	120mm CUTTING IN TEE	LL23E	24	27
8	120mm VERTICAL TEE	31340	24	27
9	120mm HORIZONTAL CROSS	31330	24	27
10	120mm END CAP KIT	LL23A	25	27

120 MM TYPE B CONNECTOR KIT

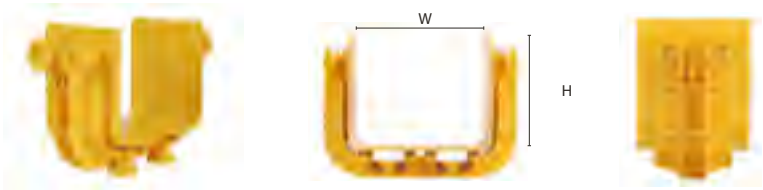


Item No.:	Spec(mm)		Overall (mm)	Color	Material
	W	H			
LL232	120	100	169x84x122	Yellow	PVC/ABS

Quickly joins two sections of channel and/or fittings. Tighten and release bolts by fingers, absolutely toolless


Accessories: 8 piece of round head screws (LT5B4 P55)

Flame retardant : UL94-V0

Drawing : on page 20

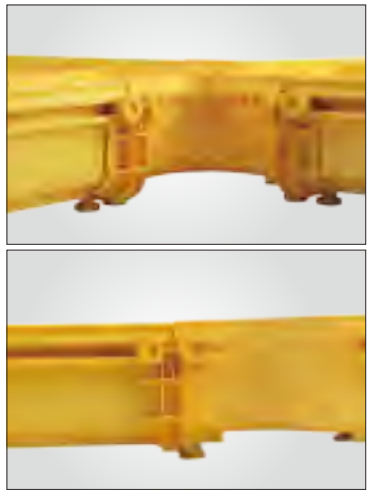

120 MM HORIZONTAL 90° ELBOW

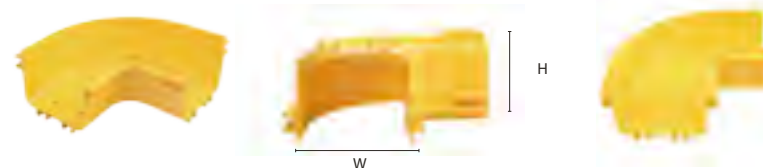


Item No.:	Name	Spec(mm)		Overall (mm)	Color	Material
		W	H			
31390	120mm Horizontal 90° elbow	120	100	258x258x118	Yellow	PVC/ABS
38392	120mm Horizontal 90° elbow cover	120	—	262x262x36	Yellow	PVC/ABS

Attaches to 120mmx100mm channel and/or fittings to create a 90° horizontal elbow from a straight horizontal run.

2 Connectors are needed for installation


Flame retardant : UL94-V0

Drawing : on page 20

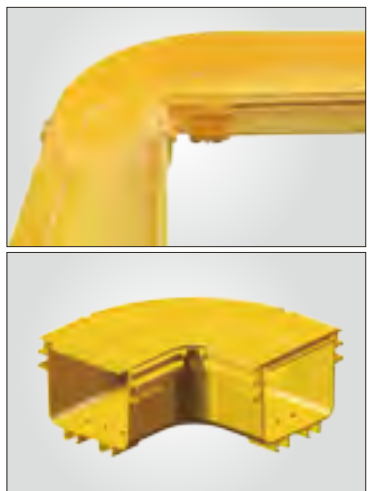

COVER

120 MM HORIZONTAL 45° ELBOW CONNECTOR FREE

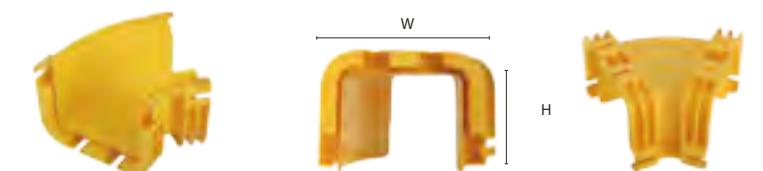


Item No.:	Name	Spec(mm)		Overall (mm)	Color	Material
		W	H			
LL23F	120mm Horizontal 45° elbow connector free	120	100	196x193x121	Yellow	PVC/ABS
38351	120mm Horizontal 45° elbow connector free cover	120	—	201x195x38	Yellow	PVC/ABS

Attaches to 120mmx100mm channel and/or fittings to create a 45° horizontal elbow from a straight horizontal run.

Installation needs T shape screw (LT5B4 P55) and twist head nut each 8 piece (LT338 P55)

Flame retardant : UL94-V0

Drawing : on page 20

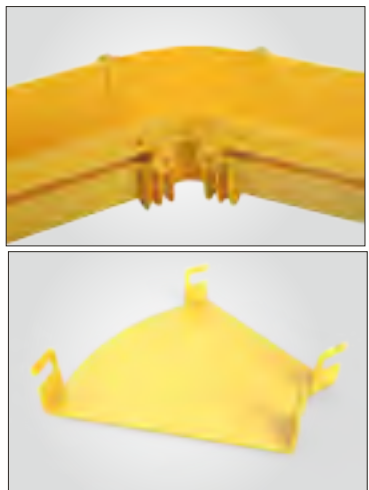


COVER

ONE-STOP MANUFACTURER OF HIGH CLASS DATA CENTER INFRASTRUCTURE

ONE-STOP MANUFACTURER OF HIGH CLASS DATA CENTER INFRASTRUCTURE

120 MM 45° UP ELBOW

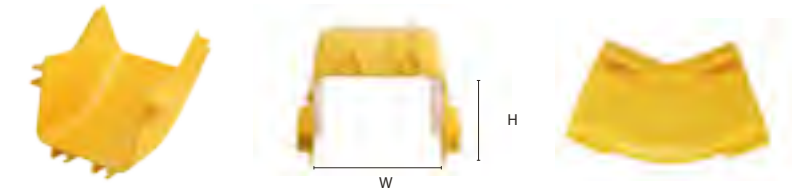

Item No.:	Name	Spec(mm)		Overall (mm)	Color	Material
		W	H			
313F0	120mm 45° Up elbow	120	100	210×155×167	Yellow	PVC/ABS
38352	120mm 45° Up elbow cover	120	—	143×166×95	Yellow	Metal

Attaches to 120mmx100mm channel and/or fitting to create a 45 ° upward angle from a straight horizontal run. Used with 45° down elbow to change level of a horizontal run.

2 Connectors are needed for installation

Flame retardant : UL94-V0

Drawing : on page 20



COVER

120 MM 45° DOWN ELBOW



Item No.:	Name	Spec(mm)		Overall (mm)	Color	Material
		W	H			
31380	120mm 45° Down elbow	120	100	187×157×162	Yellow	PVC/ABS
38353	120mm 45° Down elbow cover	120	—	199×166×100	Yellow	Metal

Attaches to 120mmx100mm channel and/or fitting to create a 45° downward angle from a straight horizontal run. Used with 45° up elbow to change level of a horizontal run.

2 Connectors are needed for installation


Flame retardant : UL94-V0

Drawing : on page 20



COVER

120 MM HORIZONTAL TEE

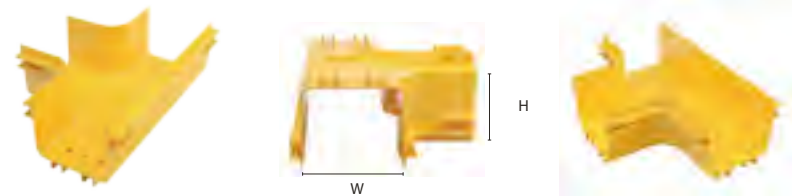



Item No.:	Name	Spec(mm)		Overall (mm)	Color	Material
		W	H			
31320	120mm Horizontal tee	120	100	356×256×118	Yellow	PVC/ABS
38332	120mm Horizontal tee cover	120	—	360×262×36	Yellow	PVC/ABS

Attaches to 120mmx100mm channel and/or fittings to creat a 90° horizontal branch from a straight horizontal run.

3 Connectors are needed for installation


Flame retardant : UL94-V0

Drawing : on page 20

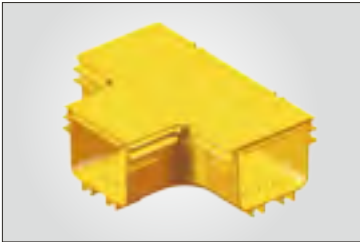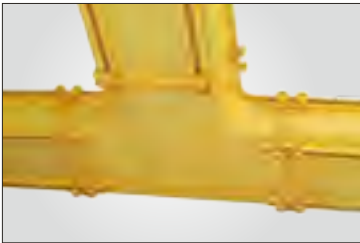

COVER

120 MM CUTTING IN TEE

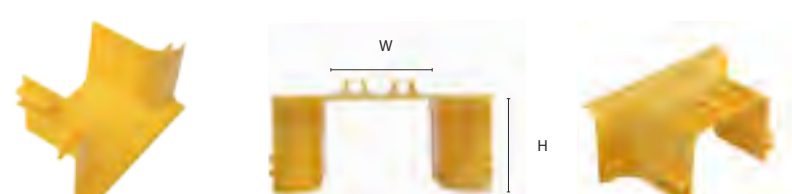



Item No.:	Name	Spec(mm)		Overall (mm)	Color	Material
		W	H			
LL23E	120mm Cutting in tee	120	100	233×132×116	Yellow	PVC/ABS
38344	120mm Cutting in tee cover	120	—		Yellow	Metal

Attaches to 120mmx100mm channel to creat a 90 ° horizontal lbow from anywhere of a straight horizontal run.

1 connectors are needed for installation ; Installation needs T shape screw (LT5B4 P55) and Twist nut each 2piece


Flame retardant : UL94-V0

Drawing : on page 21

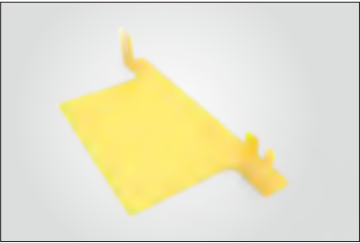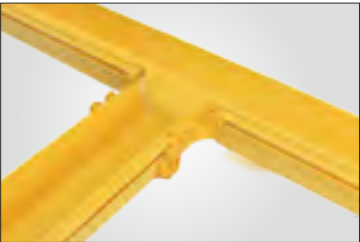

COVER

120 MM VERTICAL TEE

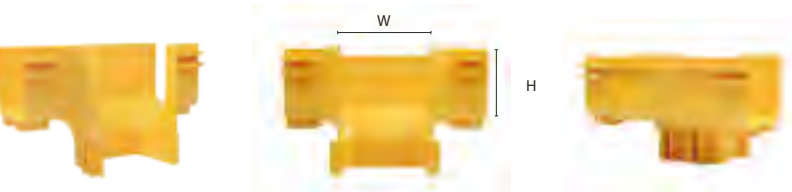


Item No.:	Name	Spec(mm)		Overall (mm)	Color	Material
		W	H			
31340	120mm Vertical tee	120	100	300×199×180	Yellow	PVC/ABS
	120mm Vertical tee cover	120	—		Yellow	Metal

Attaches to 120mmx100mm channel and/or fittings to create a 120mmx100mm 90° vertical drop from a horizontal run.

3 connectors are needed for installation

Flame retardant : UL94-V0

Drawing : on page 21

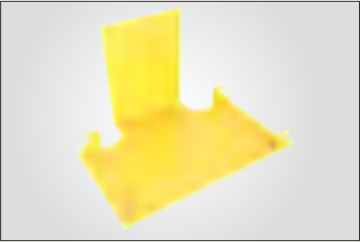

COVER

120 MM HORIZONTAL CROSS



Item No.:	Name	Spec(mm)		Overall (mm)	Color	Material
		W	H			
31330	120mm Horizontal cross	120	100	356×356×118	Yellow	PVC/ABS
38344	120mm Horizontal cross cover	120	—	360×360×36	Yellow	PVC/ABS

Attaches to 120mmx100mm channel and/or fittings to create a horizontal four way cross intersection with two 120mmx100mm exits.

4 connectors are needed for installation

Flame retardant : UL94-V0

Drawing : On Page 21



COVER

ONE-STOP MANUFACTURER OF HIGH CLASS DATA CENTER INFRASTRUCTURE

ONE-STOP MANUFACTURER OF HIGH CLASS DATA CENTER INFRASTRUCTURE



Item No.:	Spec(mm)		Overall (mm)	Color	Material
	W	H			
LL23A	120	100	150×25×116	Yellow	PVC/ABS

Used for closing off open ends of the channel or fittings.

Installation needs T shape screw (LT5B4 P55) and Twist nut each 4 piece

Flame retardant : UL94-V0

Drawing : On Page 21



120 SERIES RACEWAY DRAWING

LL232

120mm TYPE BCONNECTOR A KIT

31390

120mm HORIZONTAL 90° ELBOW

LL23F

120mm HORIZONTAL 45° ELBOW (CONNECTOR FREE)

313F0

120mm 45° UP ELBOW

31380

120mm 45° DOWN ELBOW

31320

120mm HORIZONTAL TEE

ONE-STOP MANUFACTURER OF HIGH CLASS DATA CENTER INFRASTRUCTURE

Thames 1368, (C1414CDB)
Ciudad de Buenos Aires, Argentina
www.datawaves.com

Lithery









Tel: (54-11) 4777 7707
ventas@datawaves.com

ONE-STOP MANUFACTURER OF HIGH CLASS DATA CENTER INFRASTRUCTURE

Thames 1368, (C1414CDB)
Ciudad de Buenos Aires, Argentina
www.datawaves.com

Lithery

Tel: (54-11) 4777 7707
ventas@datawaves.com

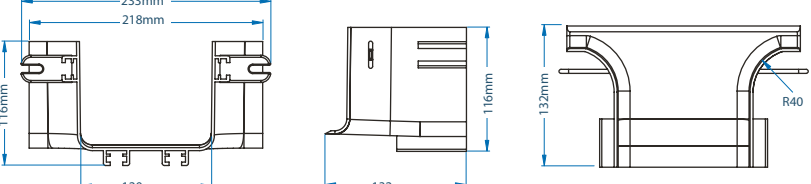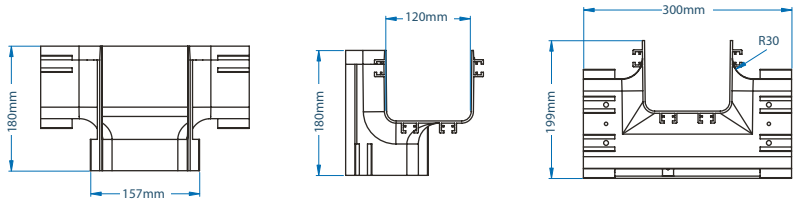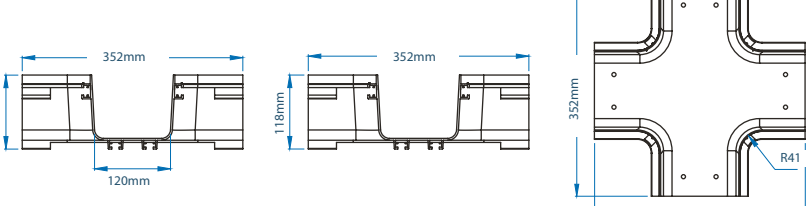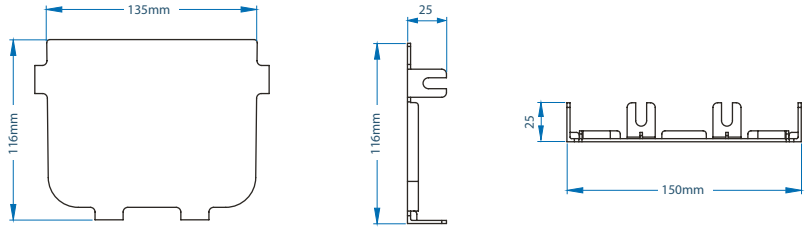LL23E  120mm CUTTING IN TEE	
31340  120mm VERTICAL TEE	
31330  120mm HORIZONTAL CROSS	
LL23A  120mm END CAP KIT	

ONE-STOP MANUFACTURER OF HIGH CLASS DATA CENTER INFRASTRUCTURE

FIBRE MANAGEMENT 240x100

FIBRE MANAGEMENT SYSTEM




240x100

FIBRE MANAGEMENT SYSTEM

ORDER INFORMATION

No.	Description	Item no.:	Page	DRAWING
1	240mm TYPE B CONNECTOR A KIT	LL262	24	28
2	240mm HORIZONTAL 90° ELBOW	31690	24	28
3	240mm HORIZONTAL 45 ° ELBOW (CONNECTOR FREE)	LL26F	24	28
4	240mm 45° UP ELBOW	316F0	25	28
5	240mm 45° DOWN ELBOW	31680	25	28
6	240mm HORIZONTAL TEE	31620	25	28
7	240mm CUTTING IN TEE	LL26E	26	29
8	240mm VERTICAL TEE	36340	26	29
9	240mm HORIZONTAL CROSS	31630	26	29
10	240mm END CAP KIT	LL26A	27	29

240 MM TYPE B CONNECTOR KIT

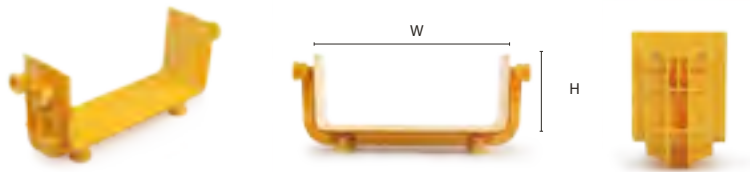


Item No.:	Spec(mm)		Overall (mm)	Color	Material
	W	H			
LL262	240	100	289x84x122	Yellow	PVC/ABS

Quickly joins two sections of channel and/or fittings. Tighten and release bolts by fingers, absolutely toolless.


Accessories: 8 Piece of round head screws

Flame retardant : UL94-V0

Drawing : on page 28

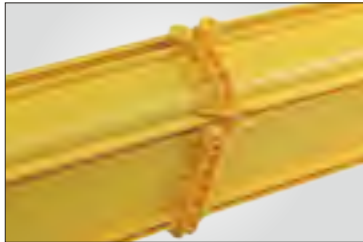

240 MM HORIZONTAL 90° ELBOW

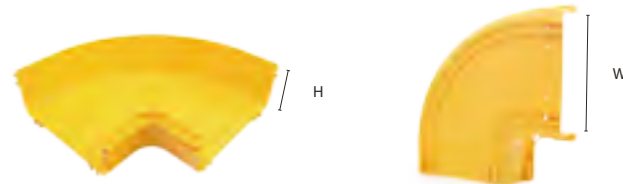


Item No.:	Name	Spec(mm)		Overall (mm)	Color	Material
		W	H			
31690	240mm Horizontal 90° elbow	240	100	277x377x119	Yellow	PVC/ABS
38692	240mm Horizontal 90° elbow cover	240	—	310x310x17.5	Yellow	PVC/ABS

Attaches to 240mmx100mm channel and/or fittings to create a 90° horizontal elbow from a straight horizontal run.

2 connectors are needed for installation

Flame retardant : UL94-V0

Drawing : on page 28

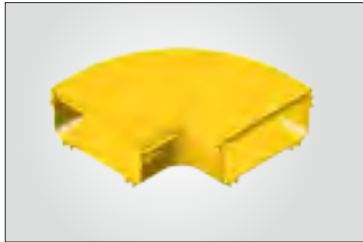

COVER

240 MM HORIZONTAL 45° ELBOW CONNECTOR FREE




Item No.:	Name	Spec(mm)		Overall (mm)	Color	Material
		W	H			
LL26F	240mm Horizontal 45° elbow Connector Free	240	100	319.5x287x121	Yellow	PVC/ABS
38651	240mm Horizontal 45° elbow Connector Free cover	240	—	290x325x40	Yellow	Metal

Attaches to 240mmx100mm channel and/or fittings to create a 45 ° horizontal elbow from a straight horizontal run.

Installation needs plastic round head screw (LT5B4 P55) and square nut each 8 piece (LT338 P55)

Flame retardant : UL94-V0

Drawing : on page 28

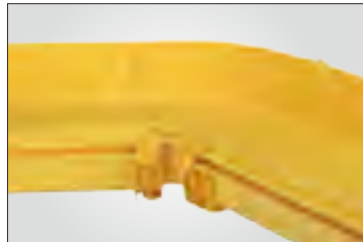

COVER

ONE-STOP MANUFACTURER OF HIGH CLASS DATA CENTER INFRASTRUCTURE

Thames 1368, (C1414CDB)
Ciudad de Buenos Aires, Argentina
www.datawaves.com

Lithery

Tel: (54-11) 4777 7707
ventas@datawaves.com


ONE-STOP MANUFACTURER OF HIGH CLASS DATA CENTER INFRASTRUCTURE

Thames 1368, (C1414CDB)
Ciudad de Buenos Aires, Argentina
www.datawaves.com

Lithery

Tel: (54-11) 4777 7707
ventas@datawaves.com

240 MM 45° UP ELBOW

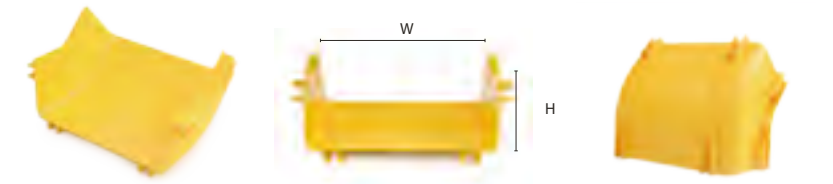


Item No.:	Name	Spec(mm)		Overall (mm)	Color	Material
		W	H			
316F0	240mm 45° Up elbow	240	100	275×210×167	Yellow	PVC/ABS
38652	240mm 45° Up elbow cover	240	—	286×143×95	Yellow	Metal

Attaches to 240mmx100mm channel and/or fitting to create a 45 ° upward angle from a straight horizontal run. Used with 45° down elbow to change level of a horizontal run.

2 Piece of 240mm connector B kit are needed for installation


Flame retardant : UL94-V0

Drawing : on page 28

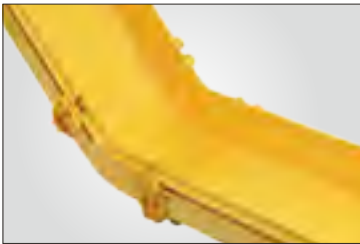

COVER

240 MM 45° DOWN ELBOW

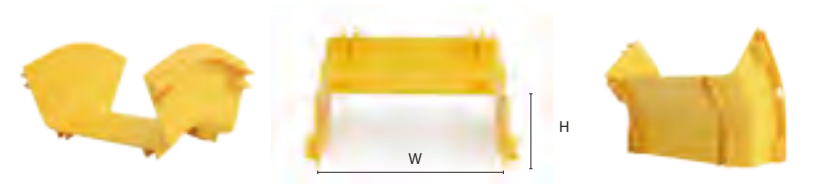

Item No.:	Name	Spec(mm)		Overall (mm)	Color	Material
		W	H			
31680	240mm 45° Down elbow	240	100	277×187×161.5	Yellow	PVC/ABS
38653	240mm 45° Down elbow cover	240	—	286×199×100	Yellow	Metal

Attaches to 240mmx100mm channel and/or fitting to create a 45° downward angle from a straight horizontal run. Used with 45° up elbow to change level of a horizontal run.

2 Piece of 240mm connector B kit are needed for installation


Flame retardant : UL94-V0

Drawing : on page 28



COVER

240 MM HORIZONTAL TEE

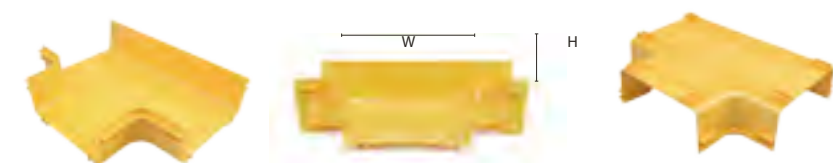



Item No.:	Name	Spec(mm)		Overall (mm)	Color	Material
		W	H			
31620	240mm Horizontal tee	240	100	276×376.5×119	Yellow	PVC/ABS
38632	240mm Horizontal tee cover	240	—	480×381×37	Yellow	PVC/ABS

Attaches to 240mmx100mm channel and/or fittings to create a 90° horizontal branch from a straight horizontal run.

3 Piece of 240mm connector B kit are needed for installation

Flame retardant : UL94-V0


Drawing : on page 28

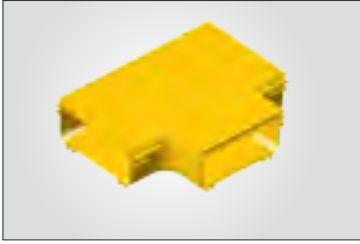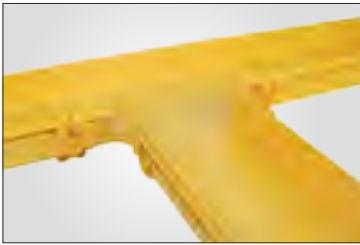

COVER

ONE-STOP MANUFACTURER OF HIGH CLASS DATA CENTER INFRASTRUCTURE

240 MM CUTTING IN TEE

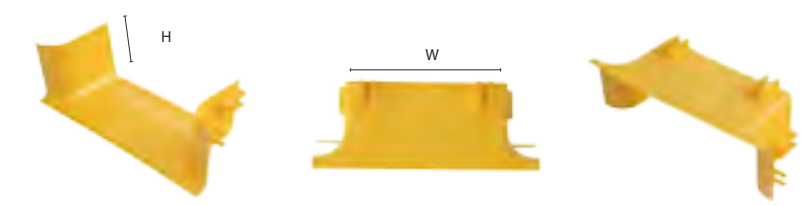

Item No.:	Name	Spec(mm)		Overall (mm)	Color	Material
		W	H			
LL26E	240mm Cutting in tee	240	100	353×132×116	Yellow	PVC/ABS
38334	240mm Cutting in tee cover	240	—		Yellow	Metal

Attaches to 240mmx100mm channel to create a 90° horizontal elbow from anywhere of a straight horizontal run.

Installation needs 1 piece of 240 connector B kit, 8 piece of plastic round head screws (LT5B4 P55) , T shape screw and twist head nut each 2 piece


Flame retardant : UL94-V0

Drawing : on page 29



COVER

240 MM TO 120 MM VERTICAL TEE

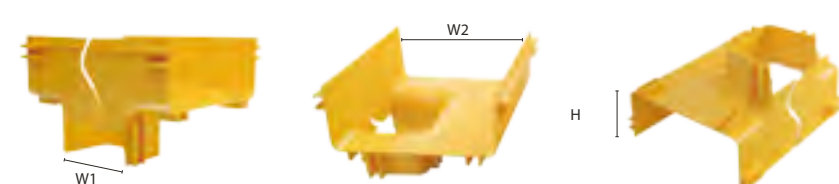

Item No.:	Spec(mm)			Overall (mm)	Color	Material
	W1	W2	H			
36340	240	120	100	300×277×190	Yellow	PVC/ABS

Attaches to 240mmx100mm channel and/or fittings to create a 120mmx100mm 90 ° vertical drop from a horizontal run.


2 Piece of 240mm connector B kit are needed for installation

Flame retardant : UL94-V0

Drawing : on page 29



240 MM HORIZONTAL CROSS

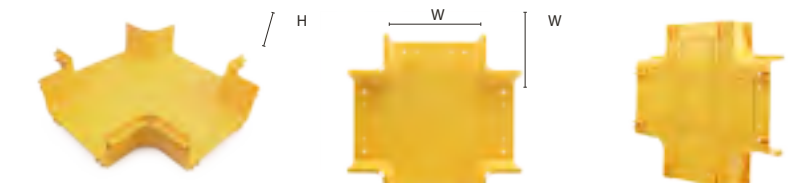

Item No.:	Name	Spec(mm)		Overall (mm)	Color	Material
		W	H			
31630	240mm Horizontal cross	240	100	476×476×119	Yellow	PVC/ABS
38644	240mm Horizontal cross cover	240	—	480×480×37	Yellow	PVC/ABS

Attaches to 240mmx100mm channel and/or fittings to create a horizontal four way cross intersection with two 240mmx100mm exits.

Installation needs 4 piece of 240mm connector B kit

Flame retardant : UL94-V0


Drawing : on page 29



COVER

ONE-STOP MANUFACTURER OF HIGH CLASS DATA CENTER INFRASTRUCTURE

240 MM END CAP KIT

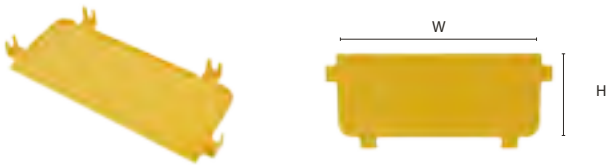

Item No.:	Spec(mm)		Overall (mm)	Color	Material
	W	H			
LL26A	240	25	270×25×115.5	Yellow	PVC/ABS

Used for closing off open ends of the channel or fittings.

Installation needs T shape screw and twist head nut each 4 piece









Flame retardant : UL94-V0

Drawing : on page 29



240 SERIES RACEWAY DRAWING

LL262 240mm TYPE BCONNECTOR KIT	
31690 240mm HORIZONTAL 90° ELBOW	
LL26F 240mm HORIZONTAL 45° ELBOW (FREECONNECTOR A KIT)	
316F0 240mm 45° UP ELBOW	
31680 240mm 45° DOWN ELBOW	
31620 240mm HORIZONTAL TEE	

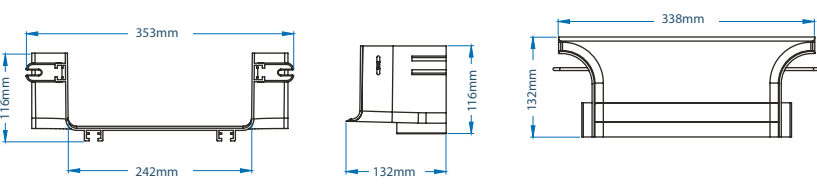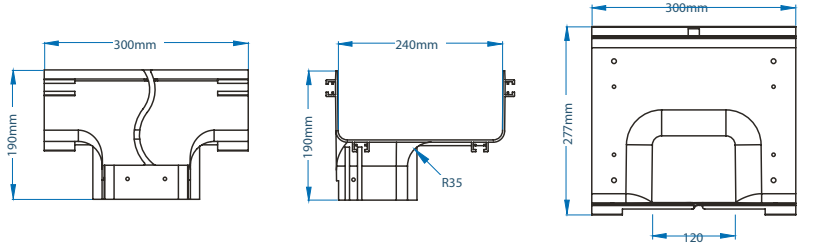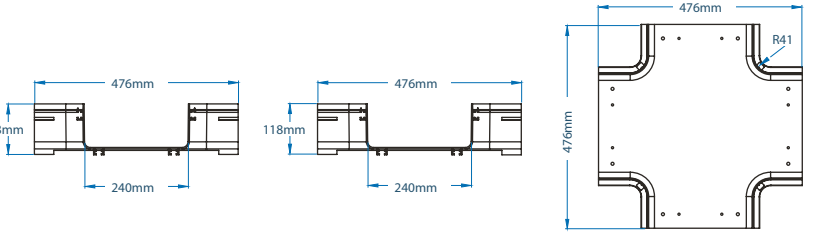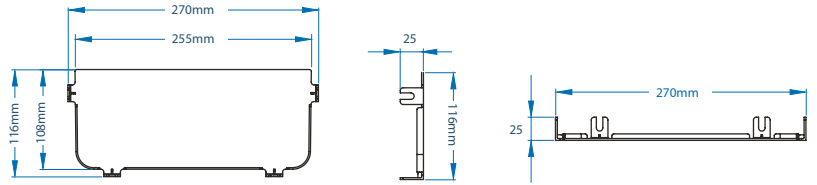LL26E  240mm CUTTING IN TEE	
36340  240mm TO 120mm VERTICAL TEE	
31630  240mm HORIZONTAL CROSS	
LL26A  240mm END CAP KIT	

ONE-STOP MANUFACTURER OF HIGH CLASS DATA CENTER INFRASTRUCTURE

FIBRE MANAGEMENT

360x100

FIBRE MANAGEMENT SYSTEM




360×100

FIBRE MANAGEMENT SYSTEM

ORDER INFORMATION

No.	Description	Item no.:	Page	DRAWING
1	360mm TYPE A CONNECTOR KIT	LL281	32	35
2	360mm HORIZONTAL 90° ELBOW	31890	32	35
3	360mm 45° UP ELBOW	318F0	32	35
4	360mm 45° DOWN ELBOW	31880	33	35
5	360mm HORIZONTAL TEE	31820	33	35
6	360mm HORIZONTAL CROSS	31830	33	35
7	360mm END CAP KIT	LL28A	34	35

360 MM TYPE A CONNECTOR KIT

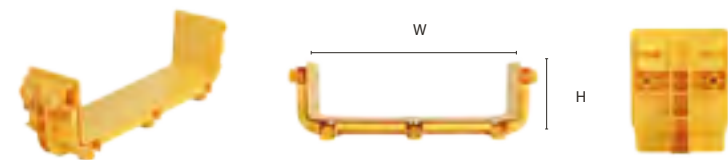

Item No.:	Spec(mm)		Overall (mm)	Color	Material
	W	H			
LL281	360	100	420×100×129	Yellow	PVC/ABS

Quickly joins two sections of channel and/or fittings. Tighten and release bolts by fingers, absolutely toolless

Installation needs plastic round head screw and square nut each 10 piece

Flame retardant : UL94-V0

Drawing : on page 35



360 MM HORIZONTAL 90° ELBOW




Item No.:	Name	Spec(mm)		Overall (mm)	Color	Material
		W	H			
31890	240mm Horizontal 90° elbow	360	100	493×493×118	Yellow	PVC/ABS
38892	240mm Horizontal 90° elbow cover	360	—	425.5×425.5×18.4	Yellow	PVC/ABS

Attaches to 360mmx100mm channel and/or fittings to create a 90° horizontal elbow from a straight horizontal run.

Installation needs 2 piece of 360 type A connectors


Flame retardant : UL94-V0

Drawing : on page 35

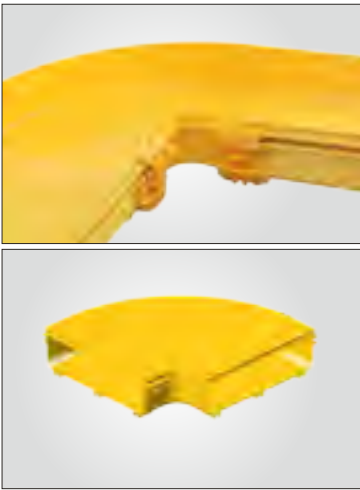

COVER

360 MM 45° UP ELBOW

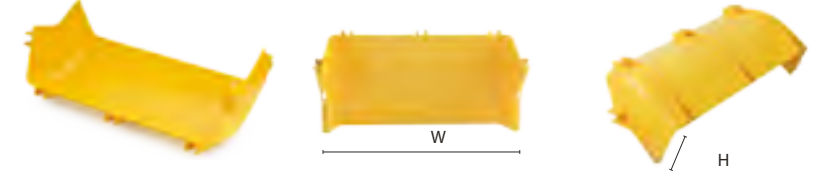

Item No.:	Name	Spec(mm)		Overall (mm)	Color	Material
		W	H			
318F0	360mm 45° Up elbow	360	100	396×205×168	Yellow	PVC/ABS
38852	360mm 45° Up elbow cover	360	—	406.5×134×91	Yellow	Metal

Attaches to 360mmx100mm channel and/or fitting to create a 45° upward angle from a straight horizontal run. Used with 45° down elbow to change level of a horizontal run.

Installation needs 2 piece of 360 type A connectors

Flame retardant : UL94-V0

Drawing : on page 35




COVER

ONE-STOP MANUFACTURER OF HIGH CLASS DATA CENTER INFRASTRUCTURE

ONE-STOP MANUFACTURER OF HIGH CLASS DATA CENTER INFRASTRUCTURE

360 MM 45° DOWN ELBOW

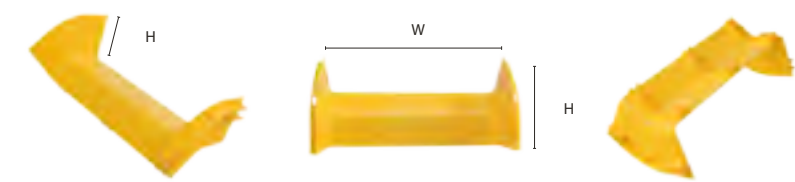


Item No.:	Name	Spec(mm)		Overall (mm)	Color	Material
		W	H			
31880	360mm 45° Down Elbow	360	100	493x493x118	Yellow	PVC/ABS
38853	360mm 45° Down Elbow cover	360	—	606x504x37	Yellow	Metal

Attaches to 360mmx100mm channel and/or fitting to create a 45° downward angle from a straight horizontal run. Used with 45° up elbow to change level of a horizontal run.

Installation needs 2 piece of 360 type A connectors


Flame retardant : UL94-V0

Drawing : on page 35

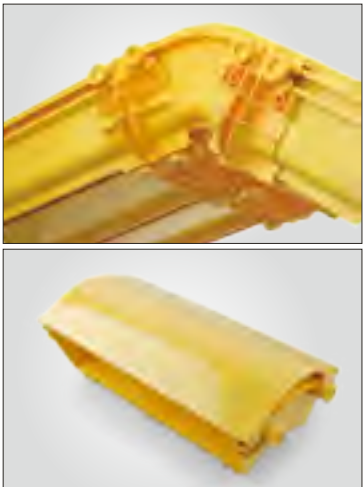

COVER

360 MM HORIZONTAL TEE

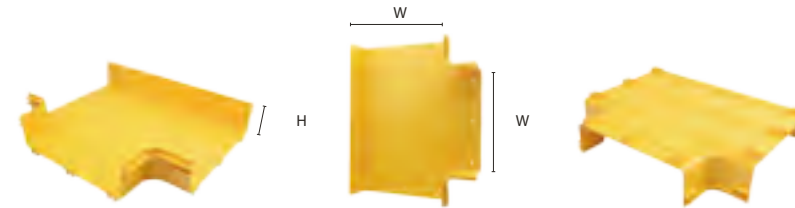


Item No.:	Name	Spec(mm)		Overall (mm)	Color	Material
		W	H			
31820	360mm Horizontal tee	360	100	493x493x118	Yellow	PVC/ABS
38832	360mm Horizontal tee cover	360	—	606x504x37	Yellow	PVC/ABS

Attaches to 360mmx100mm channel and/or fittings to create a 90° horizontal branch from a straight horizontal run.

Installation needs 3 piece of 360 type A connectors


Flame retardant : UL94-V0

Drawing : on page 35

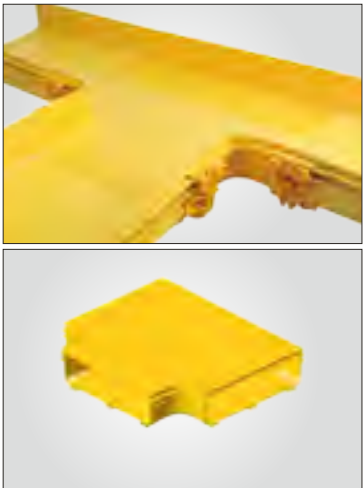

COVER

360 MM HORIZONTAL CROSS

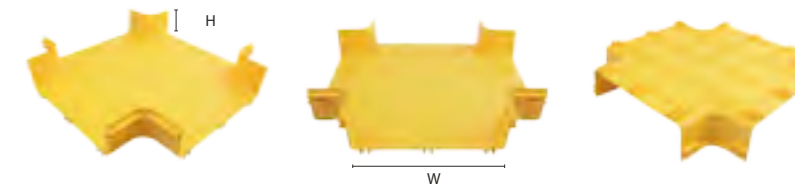


Item No.:	Name	Spec(mm)		Overall (mm)	Color	Material
		W	H			
31830	360mm Horizontal cross	360	100	590x590x118	Yellow	PVC/ABS
38844	360mm Horizontal cross cover	360	—	606x606x37	Yellow	PVC/ABS

Attaches to 360mmx100mm channel and/or fittings to create a horizontal our way cross intersection with two 360mmx100mm exits.

Installation needs 4 piece of 360 type A connectors

Flame retardant : UL94-V0

Drawing : on page 35

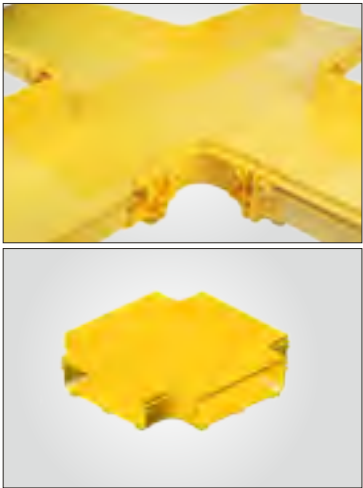

COVER

360 MM END CAP KIT




Item No.:	Spec(mm)		Overall (mm)	Color	Material
	W	H			
LL28A	360	100	390x26.5x115	Yellow	PVC/ABS

Used for closing off open ends of the channel or fittings.












Installation needs T shape screw and twist head nut each 5 piece

Flame retardant : UL94-V0

Drawing : on page 36

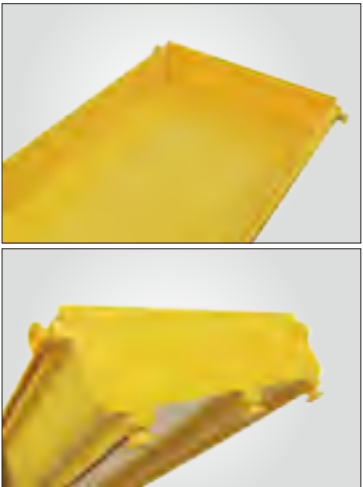

360 SERIES RACEWAY DRAWING

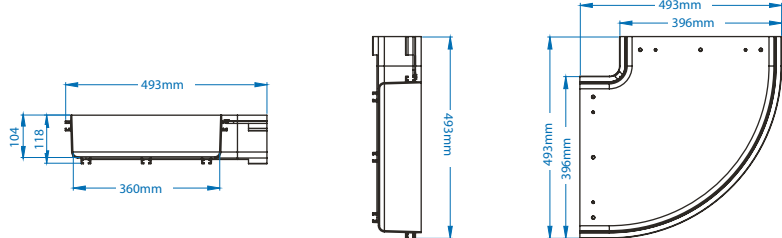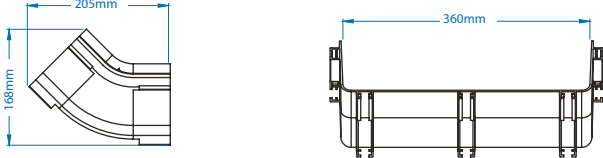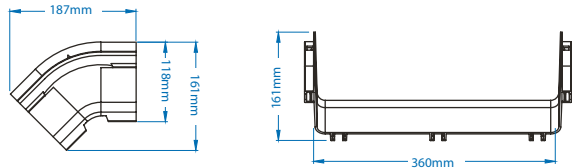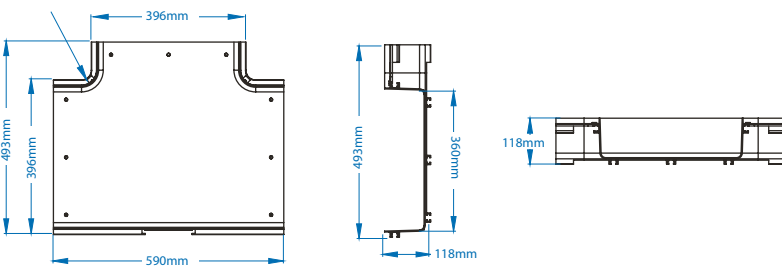
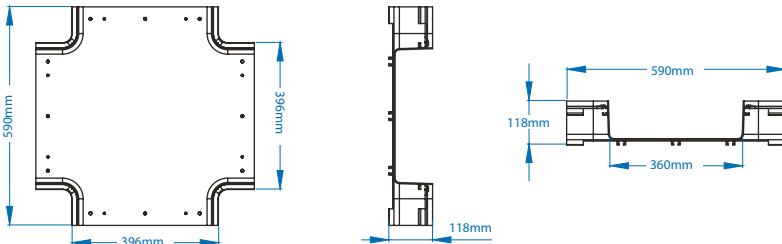
LL281  360mm TYPE A CONNECTOR A KIT	
31890  360mm HORIZONTAL 90° ELBOW	
318F0  360mm 45° UP ELBOW	
31880  360mm 45° DOWN ELBOW	
31820  360mm HORIZONTAL TEE	
31830  360mm HORIZONTAL CROSS	

ONE-STOP MANUFACTURER OF HIGH CLASS DATA CENTER INFRASTRUCTURE

Thames 1368, (C1414CDB)
Ciudad de Buenos Aires, Argentina
www.datawaves.com

Lithery

Tel: (54-11) 4777 7707
ventas@datawaves.com

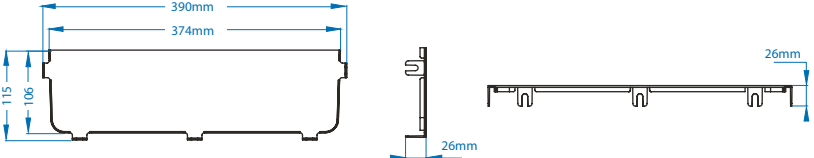316F0  360mm 45° UP ELBOW	

ONE-STOP MANUFACTURER OF HIGH CLASS DATA CENTER INFRASTRUCTURE

Thames 1368, (C1414CDB)
Ciudad de Buenos Aires, Argentina
www.datawaves.com

Lithery

Tel: (54-11) 4777 7707
ventas@datawaves.com

FIBRE MANAGEMENT 600×100

FIBRE MANAGEMENT SYSTEM



600×100mm FIBRE MANAGEMENT SYSTEM

600×100

FIBRE MANAGEMENT SYSTEM

ORDER INFORMATION

No.	Description	Item no.:	Page	Drawing
1	600mm TYPE A CONNECTOR KIT	312A0	39	40
2	600mm CUT-IN TEE	312E0	39	40
3	600mm END CAP KIT	312G0	39	40



ONE-STOP MANUFACTURER OF HIGH CLASS DATA CENTER INFRASTRUCTURE

Thames 1368, (C1414CDB)
Ciudad de Buenos Aires, Argentina
www.datawaves.com

Lithery

Tel: (54-11) 4777 7707
ventas@datawaves.com

600 MM TYPE A CONNECTOR KIT

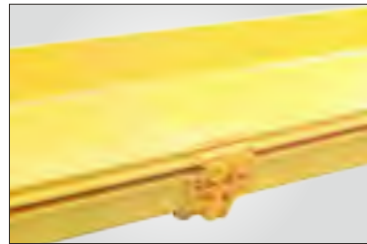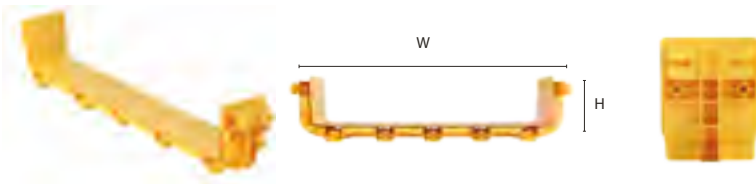

Item No.:	Spec(mm)		Overall (mm)	Color	Material
	W	H			
312A0	600	100	642×80×121	Yellow	PVC/ABS



Quickly joins two sections of channel and/or fittings. Tighten and release bolts by fingers, absolutely toolless

Installation needs plastic round head screw and square nut each 14 piece

Flame retardant : UL94-V0

Drawing : on page 40

600 MM CUT-IN TEE

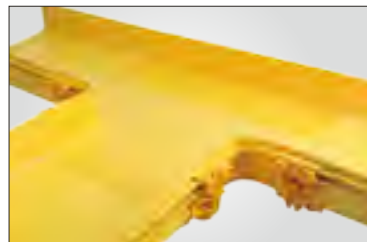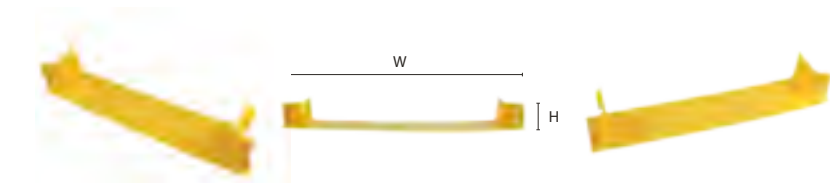


Item No.:	Name	Spec(mm)		Overall (mm)	Color	Material
		W	H			
321E0	600mm Cut-in tee	600	100	712×138×116	Yellow	PVC
	600mm Cut-in tee cover	600	—		Yellow	Metal

Attaches to 360mmx100mm channel and/or fittings to creat a 90° horizontal branch from a straight horizontal run.

Installation needs 3 piece of 360 type A connectors


Flame retardant : UL94-V0

Drawing : on page 40

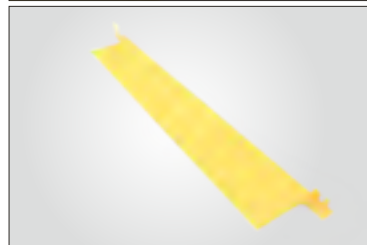

COVER

600 MM END CAP KIT

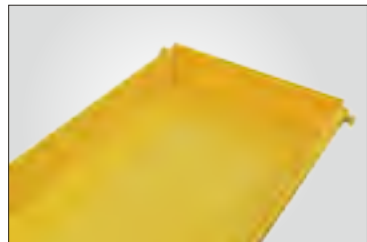

Item No.:	Spec(mm)		Overall (mm)	Color	Material
	W	H			
312G0	600	100	641×22.5×121	Yellow	PVC

Used for closing off open ends of the channel or fittings.

Installation needs T shape screw and twist head nut each 7 piece

Flame retardant : UL94-V0


Drawing : on page 40



600 SERIES RACEWAY DRAWING

312A0 600 TYPE A CONNECTOR KIT	
312E0 600 CUT-IN TEE	
312G0 600 END CAP KIT	

240 TO 120 ADAPTER

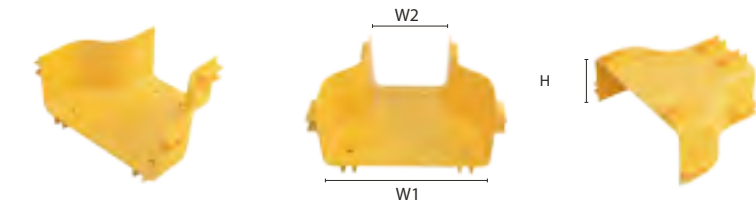


Item No.:	Name	Spec(mm)			Overall (mm)	Color	Material
		W1	W2	H			
321E0	240 to 120 Adapter	240	120	100	205×277×119	Yellow	PVC/ABS
38B31	240 to 120 Adapter Cover	240	120	—	290×209×40	Yellow	Metal

Attaches any 240mmx100mm fitting or channel to any 120mmx100mm fitting or channel.


Installation needs Installation needs 240 type B connector and 120 type B connector each 1 piece

Flame retardant : UL94-V0

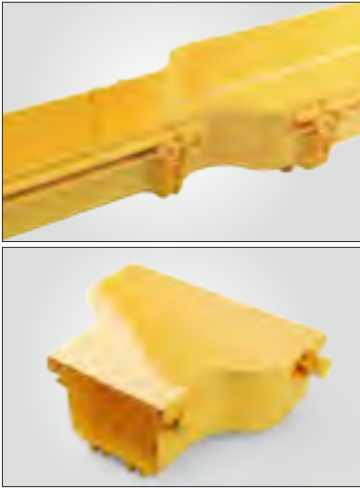

COVER

360 TO 240 ADAPTER

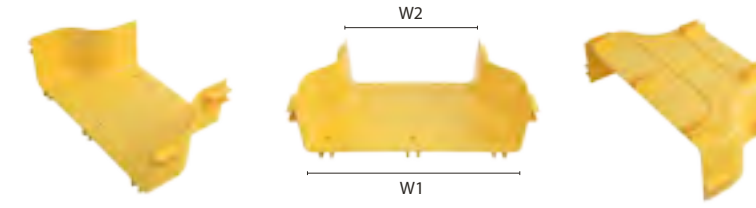

Item No.:	Name	Spec(mm)			Overall (mm)	Color	Material
		W1	W2	H			
36510	360 to 240 Adapter	360	240	100	396×205×118	Yellow	PVC/ABS
38C21	360 to 240 Adapter Cover	360	240	—	406.5×210×40	Yellow	Metal

Attaches any 360mmx100mm fitting or channel to any 240mmx100mm fitting or channel.


Installation needs 360 type A connector and 240 type B connector each 1 piece

Flame retardant : UL94-V0



COVER

600 TO 360 ADAPTER

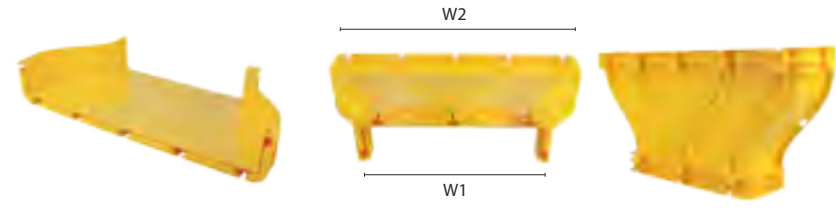


Item No.:	Name	Spec(mm)			Overall (mm)	Color	Material
		W1	W2	H			
36610	600 to 360 Adapter	600	360	100	642×281×121	Yellow	PVC
	600 to 360 Adapter Cover	600	360	—		Yellow	Metal

Attaches any 600mmx100mm fitting or channel to any 360mmx100mm fitting or channel.


Installation needs 600 type A connector and 360 type B connector each 1 piece

Flame retardant : UL94-V0

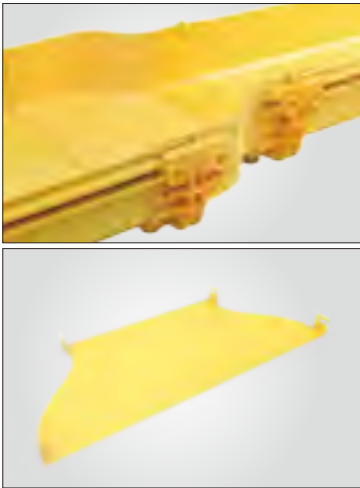

COVER

ADAPTOR FROM PANDUIT 100 MM TO LITHERY 120

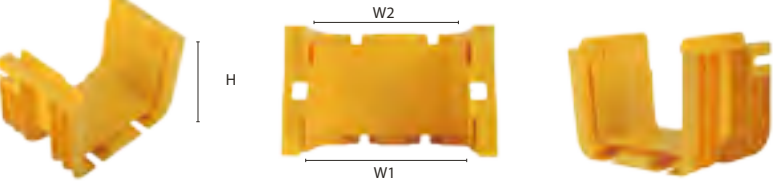


Item No.:	Name	Spec(mm)		Overall (mm)	Color	Material
		W1	W2			
LE215	Adapter From PANDUIT 100mm to LITHERY 120mm	120	100	165×100×121	Yellow	PVC/ABS
	Adapter From PANDUIT 100mm to LITHERY 120mm Cover	120	100		Yellow	Metal

Convert Panduit system to Lithery's with this adaptor


Installations needs just screws

Flame retardant : UL94-V0

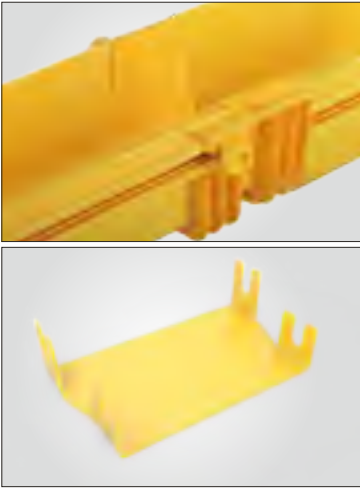

COVER

ADAPTOR FROM ADC 100 TO LITHERY 120

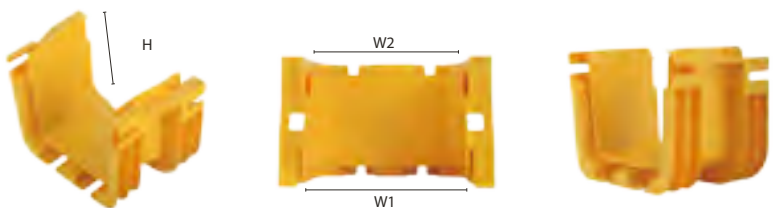


Item No.:	Name	Spec(mm)		Overall (mm)	Color	Material
		W1	W2			
LE215	Adapter From ADC 100mm to LITHERY 120mm	120	100	165×100×121	Yellow	PVC/ABS
	Adapter From ADC 100mm to LITHERY 120mm Cover	120	100		Yellow	Metal

Convert ADC 100mm system to Lithery 120mm system.


Installation needs just screws

Flame retardant : UL94-V0

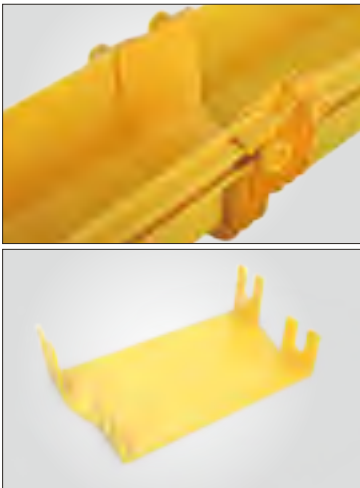

COVER

ADAPTOR FROM PANDUIT 150 TO LITHERY 120

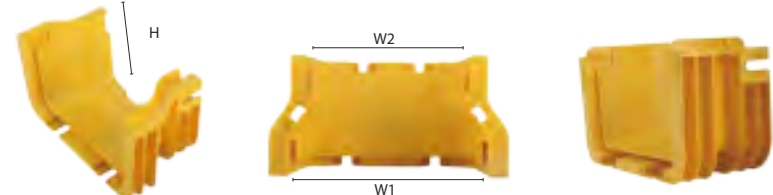


Item No.:	Name	Spec(mm)		Overall (mm)	Color	Material
		W1	W2			
LE225	Adapter From PANDUIT 150mm to LITHERY 120mm	150	120	201×100×121	Yellow	PVC/ABS
	Adapter From PANDUIT 150mm to LITHERY 120mm Cover	150	120		Yellow	Metal

Convert Panduit 150mm system to Lithery 120mm system

Installation needs just screws

Flame retardant : UL94-V0

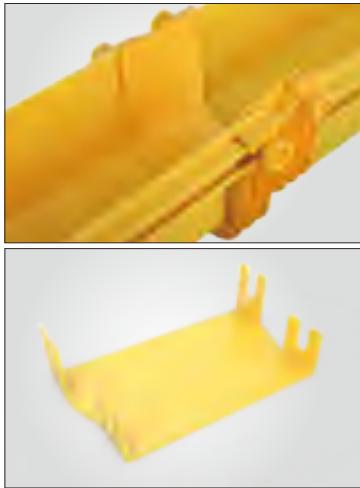

COVER

ONE-STOP MANUFACTURER OF HIGH CLASS DATA CENTER INFRASTRUCTURE

Thames 1368, (C1414CDB)
Ciudad de Buenos Aires, Argentina
www.datawaves.com

Lithery

Tel: (54-11) 4777 7707
ventas@datawaves.com


ONE-STOP MANUFACTURER OF HIGH CLASS DATA CENTER INFRASTRUCTURE

Thames 1368, (C1414CDB)
Ciudad de Buenos Aires, Argentina
www.datawaves.com

Lithery

Tel: (54-11) 4777 7707
ventas@datawaves.com

ADAPTOR FROM ADC 150 TO LITHERY 120

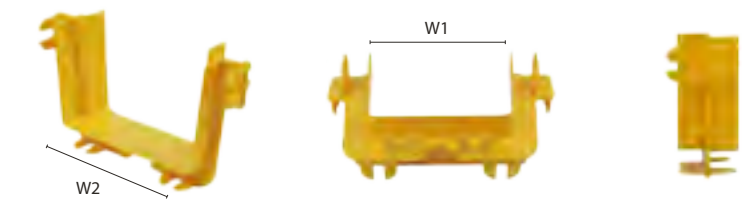


Item No.:	Spec(mm)			Overall (mm)	Color	Material
	W1	W2	H			
LE221	120	150	100	199×60×122	Yellow	PVC/ABS


Convert ADC 150mm system to Lithery 120mm system

Installation needs T shape screw (LT5B4 P55) and twist head nut each 8 piece (LT338 P55)

Flame retardant : UL94-V0

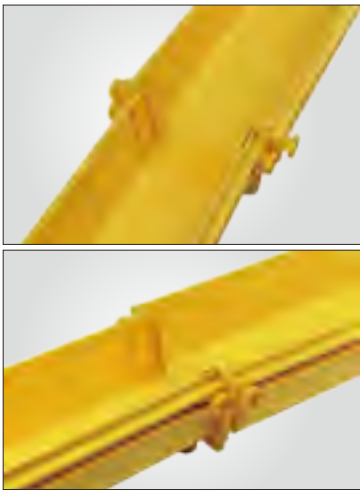

240 TO 120 HORIZONTAL CROSS

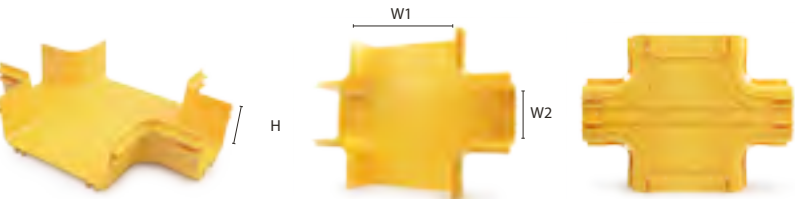


Item No.:	Name	Spec(mm)			Overall (mm)	Color	Material
		W1	W2	H			
36330	240 to 120 Horizontal cross	240	120	100	476×356×119	Yellow	PVC
38B42	240 to 120 Horizontal cross cover	240	120	—	476×355×40	Yellow	Metal

Attaches to 240mmx100mm channel and/or fittings to create a horizontal four way cross intersection with two 120mmx100mm EXITS.


Installation needs 240 type B connector and 120 type B connector each 2 piece

Flame retardant : UL94-V0

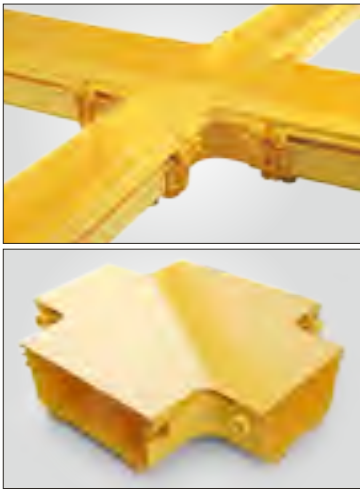

COVER

240 TO 120 HORIZONTAL TEE

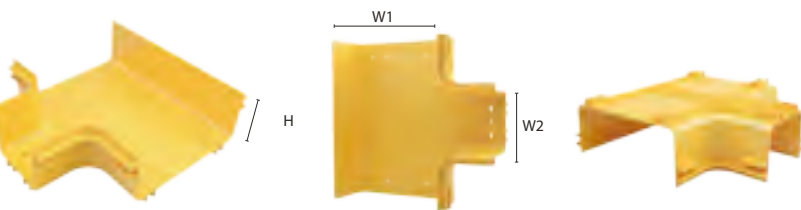

Item No.:	Name	Spec(mm)			Overall (mm)	Color	Material
		W1	W2	H			
36320	240 to 120 Horizontal tee	240	120	100	350×372×117	Yellow	PVC
38B31	240 to 120 Horizontal tee cover	240	120	—	350×372×117	Yellow	Metal

Attaches to 240mmx100mm channel and/or fittings to create a 90 ° horizontal branch with a 120mmx100mm exit from straight horizontal run.

Installation needs 240 type B connector 2 piece and 120 type B connector 1 piece

Flame retardant : UL94-V0



COVER

CABLE EXIT



Lithery

ONE-STOP MANUFACTURER

OF CABLE SUPPORT PRODUCTS FOR HIGH CLASS DATA CENTERS

ONE-STOP MANUFACTURER OF HIGH CLASS DATA CENTER INFRASTRUCTURE

CABLE EXIT

120 MM MOVABLE EXIT KIT




Item No.:	Name	Spec(mm)		Overall (mm)	Color	Material
		W	H			
LC240	120mm Movable exit kit	120	170	250×211×146	Yellow	PVC/ABS
38064	120mm Movable exit kit cover	120	—	258×260×149	Yellow	PVC/ABS

Assembles onto 120mmx100mm,240mmx100mm,360mmx100mm channel, spilling over the side into a 120mm movable exit.

Installation needs T shape screw (LT5B4 P55) and twist head nut (LT338 P55) each 2 piece

Flame retardant : UL94-V0

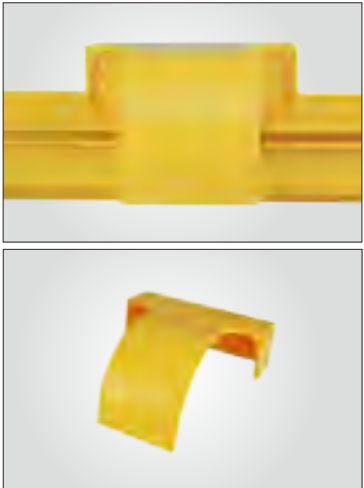

COVER

130 MM MOVABLE EXIT KIT




Item No.:	Name	Spec(mm)		Overall (mm)	Color	Material
		W	H			
LC210	130mm Movable exit kit	130	170	226×170×130	Yellow	PVC/ABS
38161	130mm Movable exit kit cover	130	—	148×103×153	Yellow	PVC/ABS

Assembles onto 120mmx100mm,240mmx100mm,360mmx100mm channel, spilling over the side into a 130mm movable exit.

Installation needs T shape screw (LT5B4 P55) and twist head nut (LT338 P55) each 2 piece

Flame retardant : UL94-V0

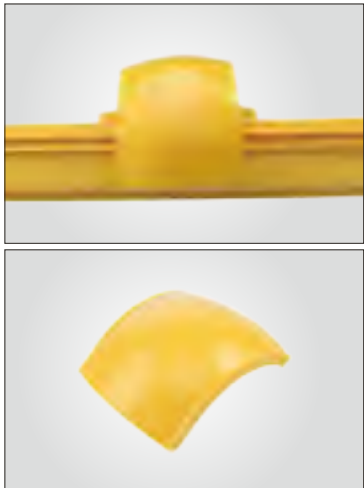

COVER

CORRUGATED PIPE AND ACCESSORIES

Item No.:	Name	Spec(mm)	Overall (mm)	Color	Material
LCK02	Pipe fixer	50	56×52×23	Yellow	PVC/ABS
LCR50	Corrugated pipe	Φ50mm	Φ50	Yellow	PVC/ABS
LCR90	Corrugated pipe	Φ90mm	Φ90	Yellow	PVC/ABS

Suits for all Lepin's cable exits

Pipe fixer is necessary for installation of the corrugated pipes

Length of the pipe is available upon demand



Pipe Fixer Corrugated Pipe

CABLE EXIT BRACKET

Item No.:	Spec L(mm)	Overall (mm)	Application range	Surface treatment
33040	—	—	All cable exits	Electroplated Zinc Powder coated

Reinforce the movable cable exit

Color : ☐ ☒ ☐ ☐ ☐




MOUNTING SUPPORT KITS

Lithery's raceway can be mounted from walls, ladder rack, ceiling, on raised floor support brackets, on floors, or to the top of equipment racks or frames.




ONE-STOP MANUFACTURER OF HIGH CLASS DATA CENTER INFRASTRUCTURE

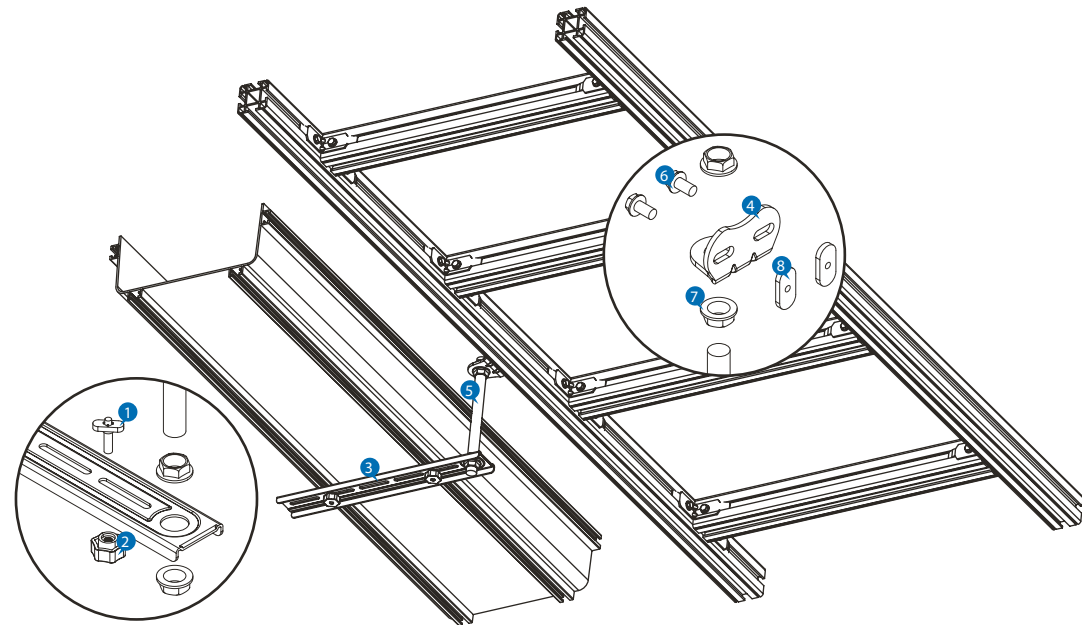


ALUMINUM LADDER RACK SIDE SUPPORT
(SUIT FOR ALL THE SIZES)

- | | |
|--------------------------------------|------------------------|
| 1 LT147 Plastic T shape boltx2 (P49) | 5 Threaded rodx1 |
| 2 LT343 Plastic twist nutx2 (P49) | 6 M6 Bolt x2 |
| 3 Single hole barx1 (P48) | 7 Flange nutx4 |
| 4 LD120 Ladder rack bracketx1 | 8 LT344 Flexible nutx2 |

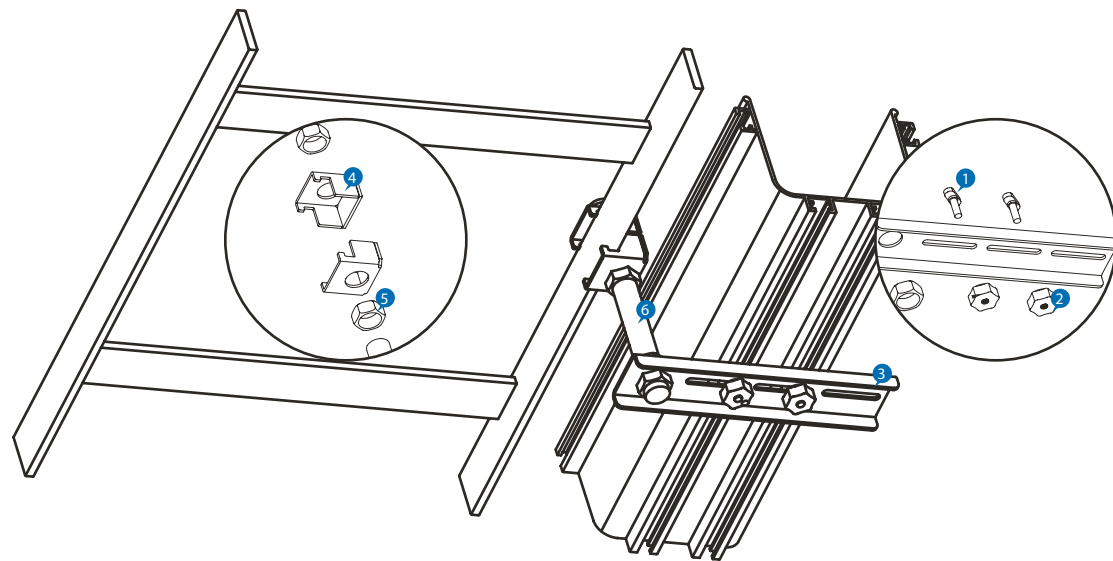


FLAT STEEL LADDER RACK SIDE SUPPORT
(SUIT FOR ALL THE SIZES)

- | | |
|--------------------------------------|------------------------------|
| 1 LT147 Plastic T shape boltx2 (P55) | 4 LD360 Flat steel fixturex2 |
| 2 LT343 Plastic twist nutx2 (P55) | 5 Flange nutx4 |
| 3 Single hole barx1 (P54) | 6 Threaded rodx1 |

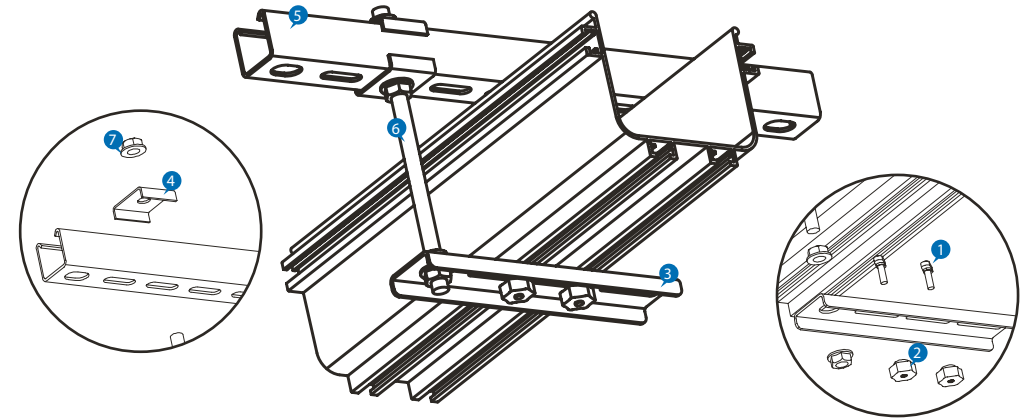

STRUT CHANNEL MOUNTING SUPPORT
(SUIT FOR ALL THE SIZES)

- | | |
|--------------------------------------|------------------|
| 1 LT147 Plastic T shape boltx2 (P55) | 5 Threaded rodx1 |
| 2 LT343 Plastic twist nutx2 (P55) | 6 Flange nutx4 |
| 3 Single hole barx1 (P54) | |
| 4 Strut channel clamp kitx1 | |

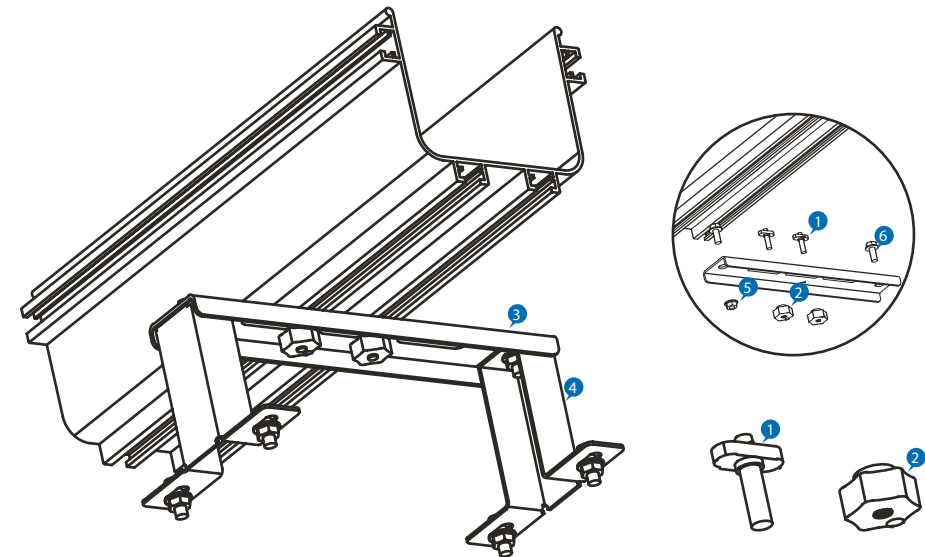

CABINET TOP SUPPORT KIT
(SUIT FOR ALL THE SIZES)

- | | |
|--------------------------------------|-----------------------------|
| 1 LT147 Plastic T shape boltx2 (P55) | 4 LST10 Cabinet top standx2 |
| 2 LT343 Plastic twist nutx2 (P55) | 5 M8 Flange nutx6 |
| 3 Dual-hole barx1 (P54) | 6 M8 boltx6 |

ONE-STOP MANUFACTURER OF HIGH CLASS DATA CENTER INFRASTRUCTURE

Thames 1368, (C1414CDB)
Ciudad de Buenos Aires, Argentina
www.datawaves.com

Lithery


Tel: (54-11) 4777 7707
ventas@datawaves.com

ONE-STOP MANUFACTURER OF HIGH CLASS DATA CENTER INFRASTRUCTURE

Thames 1368, (C1414CDB)
Ciudad de Buenos Aires, Argentina
www.datawaves.com


Lithery

Tel: (54-11) 4777 7707
ventas@datawaves.com

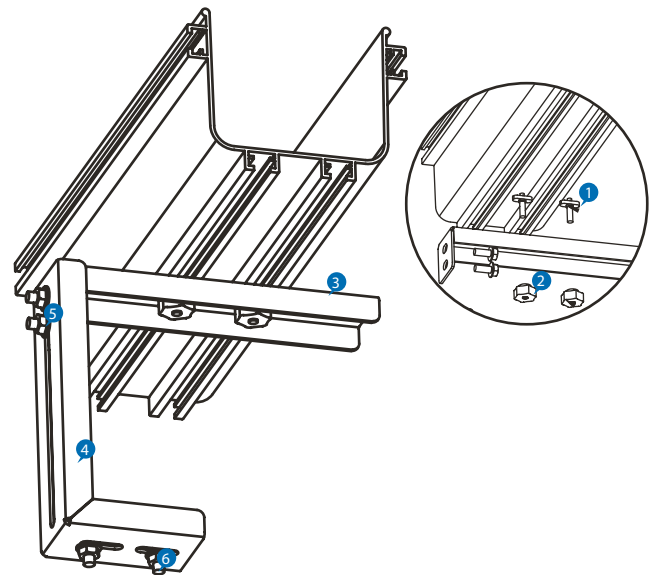


ADJUSTABLE CABINET TOP SUPPORT KIT
(SUIT FOR ALL THE SIZES)

- | | |
|--|--|
| 1 LT147 Plastic T shape boltx2 (P55) | 4 LST30 Adjustable cabinet top support standx1 (P54) |
| 2 LT343 Plastic twist nutx2 (P55) | 5 M8 Flange nutx6 |
| 3 Adjustable cabinet top support barx1 (P54) | 6 M8 boltx6 |

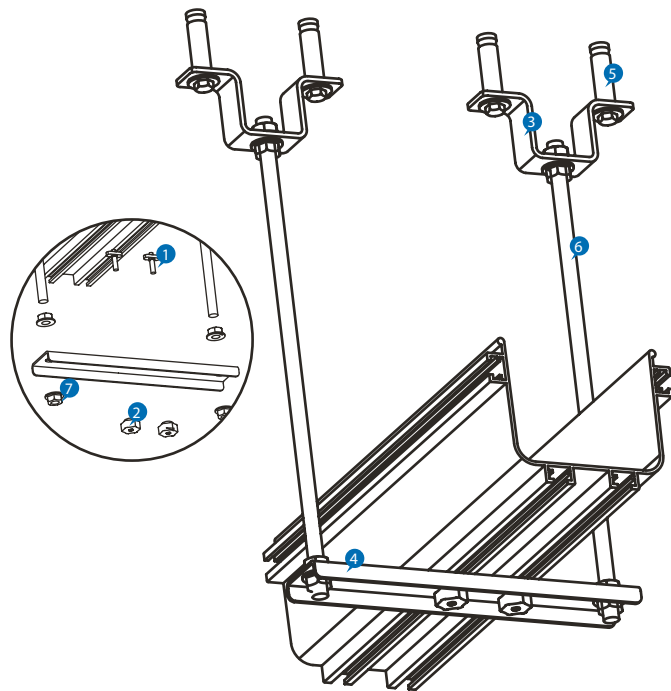


CEILING MOUNTING SUPPORT KIT
(SUIT FOR ALL THE SIZES)

- | | |
|--------------------------------------|--------------------|
| 1 LT147 Plastic T shape boltx2 (P55) | 5 Expansion boltx2 |
| 2 LT343 Plastic twist nutx2 (P55) | 6 Threaded rodx2 |
| 3 LT630 Q Bracketx2 | 7 Flange nutx8 |
| 4 Dual hole barx1 (P54) | |

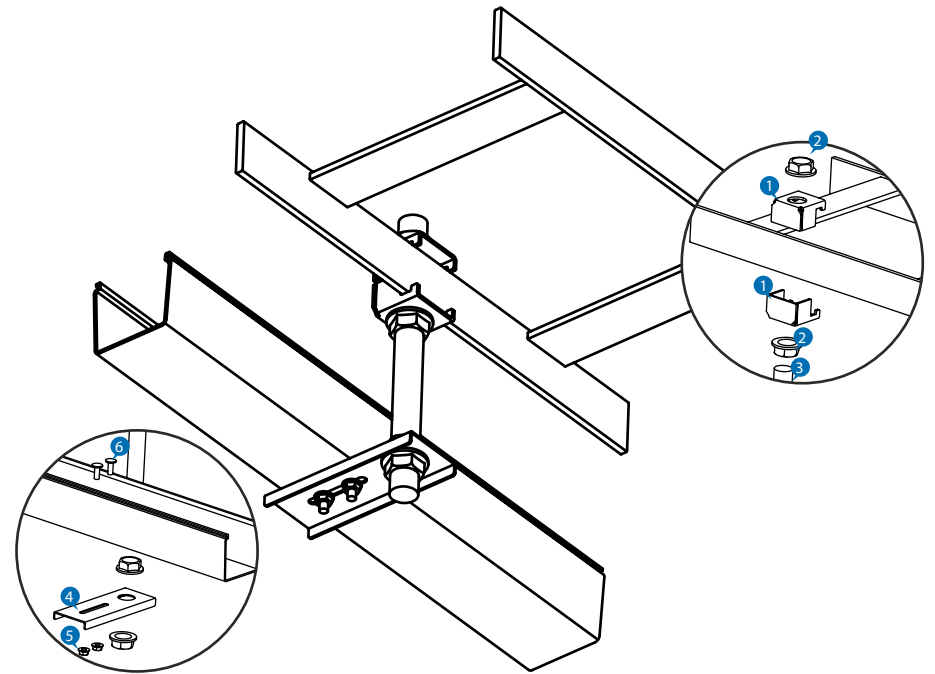


60x60 LADDER RACK MOUNTING

- | | |
|------------------------------|---------------------|
| 1 LD360 Flat steel fixturex2 | 4 Single hole barx1 |
| 2 M16 Flange nutx4 | 5 M6 Flange nutx2 |
| 3 M16 Threaded rodx1 | 6 M6 boltx2 |

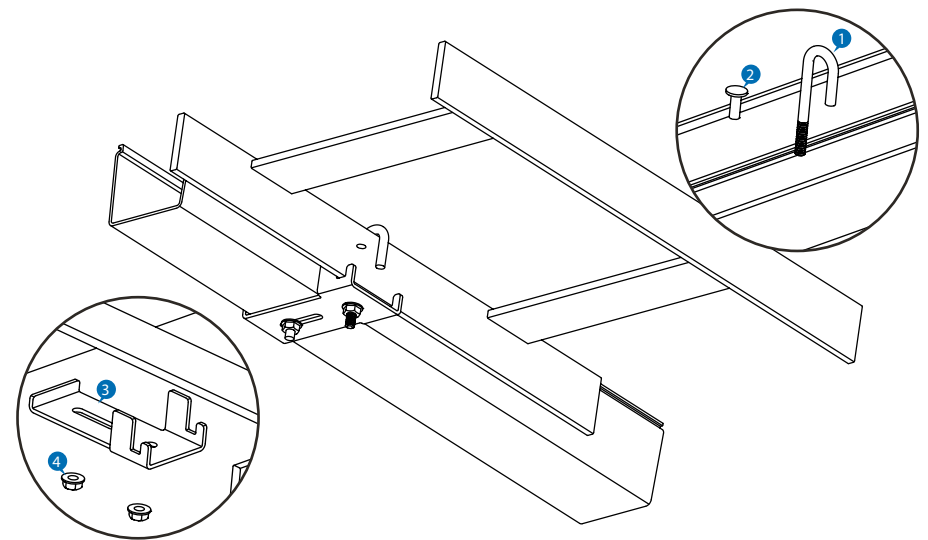


60x60 LADDER RACK MOUNTING

- | | |
|----------------|-------------------------|
| 1 Hook screwx1 | 3 Ladder rack fixturex1 |
| 2 M6x14 boltx1 | 4 M6 Flange nutx2 |

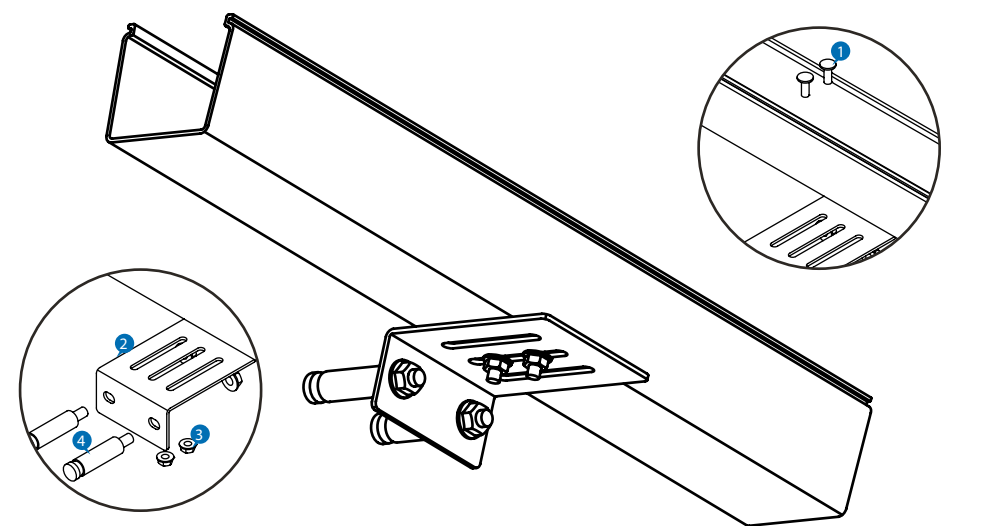

60x60 WALL MOUNTING

- 1 M6x14 boltx2
- 2 holderx1
- 3 Flange nutx4
- 4 Expansion boltx2

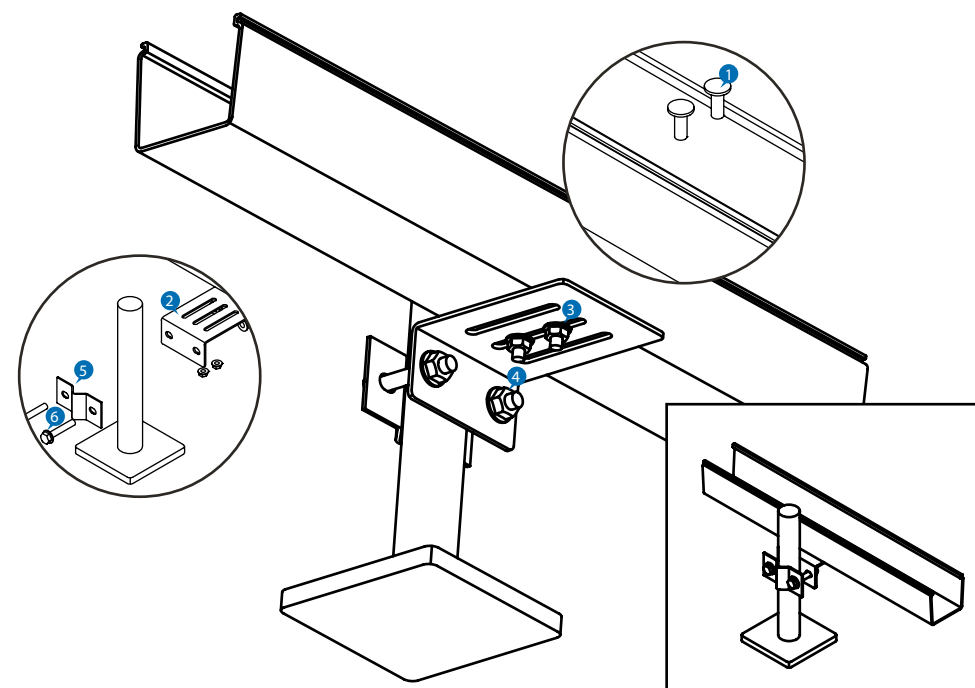

60x60 UNDER ACCES FLOOR MOUNTING

- 1 M6×14 bolt×2
- 2 holder×1
- 3 M6 Flange nut×2
- 4 M8 Flange nut×2
- 5 Pedestal clamp×1
- 6 M8 bolt×2



SINGLE HOLE BAR

Item No.:	Spec L(mm)	Overall (mm)	Application range	Surface treatment
LI2D1	120	230×47×12	120 straight section	Electroplated Zinc Powder coated
LI2D2	240	350×47×12	240 straight section	
LI2D3	360	450×50×23	360 System straight section	

Suits for various single threaded rod mounting supports

Color :



DUAL HOLE BAR

Item No.:	Spec L(mm)	Overall (mm)	Application range	Surface treatment
LI2S1	300	300×50×15	120 straight section	Electroplated Zinc Powder coated
LI2S2	400	400×50×15	240 straight section	
LI2S3	500	500×50×15	360 System straight section	

Suits for various double threaded rod mounting supports

Color : ☐ ☒ ☐ ☐ ☐



WALL BRACKET

Item No.:	Spec L(mm)	Overall (mm)	Application range	Surface treatment
LI2Q1	230	230×50×100	120 straight section	Electroplated Zinc Powder coated
LI2Q2	350	350×50×100	240 straight section	

Suits for all fiber raceways' size within 240mm, length can be prolonged according to site situation.

Color :



ADJUSTABLE CABINET TOP SUPPORT BAR

Item No.:	Spec L(mm)	Overall (mm)	Application range	Surface treatment
LI2G1	230	230×50×50	120 straight section	Electroplated Zinc Powder coated
LI2G2	350	350×50×50	240 straight section	

Suits for raceways¹ size with 240mm, mounting with Item No.LST30

Color :



ADJUSTABLE CABINET TOP SUPPORT STAND

Item No.:	Spec H(mm)	Overall (mm)	Application range	Surface treatment
LST30	200	100x50x200	50-200	Electroplated Zinc Powder coated

Suits for fibre raceways installation at cabinet top, mounting with adjustable cabinet top support bar

Color : ☐ ☒ ☐ ☐ ☐





CUTTING IN TEE BRACKET


Item No.:	Overall (mm)
33010	132×25×19

in kit



HINGED COVER UPPER PART

Item No.:	Overall (mm)
33020	50×18.5×11.5



HINGED COVER LOWER PART

Item No.:	Overall (mm)
33030	50×36×11.5



PLASTIC ROUND HEAD BOLT

Item No.:	Spec (mm)	Overall (mm)
LT5B4	M5×15	Φ27×28.5




PLASTIC SQUARE NUT

Item No.:	Spec (mm)	Overall (mm)
LT338	M5	18×18×8



PLASTIC SHAPE BOLT

Item No.:	Spec (mm)	Overall (mm)
LT147	M6×15	26×20.5×11



PLASTIC TWIST NUT

Item No.:	Spec (mm)	Overall (mm)
LT343	M6	Φ24.5×14

ONE-STOP MANUFACTURER OF HIGH CLASS DATA CENTER INFRASTRUCTURE

Thames 1368, (C1414CDB)
Ciudad de Buenos Aires, Argentina
www.datawaves.com

Lithery

Tel: (54-11) 4777 7707
ventas@datawaves.com

ONE-STOP MANUFACTURER OF HIGH CLASS DATA CENTER INFRASTRUCTURE

Thames 1368, (C1414CDB)
Ciudad de Buenos Aires, Argentina
www.datawaves.com

Lithery

Tel: (54-11) 4777 7707
ventas@datawaves.com